



NANO MIX-INT

Triple Diode DMX Controlled Line Voltage
Small Profile Linear LED Fixture

Customer:

Date:

Type:

Project:



- Consistent color washing, even when viewed at close proximity.
- Features a 4-channel design, allowing use of white or single color additional LED.
- Boasts a compact and versatile design, suitable for dry environments
- Fixture comes in 6" increments (12" minimum).
- Many options and accessories to suit a range of projects.
- Seamlessly integrates with the Boca Wireless DMX Router system, facilitating easy installation and control.
- Operates with any standard 512 DMX controller.
- Constructed with an anodized aluminum housing, enhancing durability for demanding installations.
- For assistance with custom installations, please reach out to Boca Flasher for expert guidance.
- Total linear feet per power feed: 40 ft. @ 120V per Nanorouter port.
- [Knife Edge Cove](#) compatible.




PRODUCT SPECIFICATIONS:

		COLOR OPTION	OPTIC	VOLTAGE	FINISH	MOUNTING	LENS	BAFFLE (Not Available with 10° Optics)	REFLECTOR
NanoMix-INT					A				
	RGB(W)	5000K	10°	90-120V	A Clear Anodized Aluminum	F Fixed	C Clear	SQ Square	N No
	2000K	6500K	15°x40°	230-277V		H Hinge	CLD Clear Light Diffused (Not Available with 15°x45° Optics)	ASYM Asymmetric	Y Yes (Not Available with Optics)
	2400K	Red	120°		*Contact Factory for Custom Options		HD Heavy Diffused (Not Available with 15°x45° Optics)		
	2700K	Blue							
	3000K	Amber							
	3500K	Green							
	4000K								
RATING	ACCESSORY	KNIFE EDGE COVE							
I									
I Interior	T Track Mount (Only available with Fixed Mounting)	Y YES	N NO						

DIMENSIONS:


Plan View



Elevation View



End View



NANO MIX-INT

Triple Diode DMX Controlled Line Voltage
Small Profile Linear LED Fixture




TECHNICAL SPECIFICATIONS:

WATTAGE	6 watts per linear ft.
INPUT VOLTAGE	90-120V, 277V
CONTROL	NanoRouter - DMX
POWER CABLE	UL Standard 10 ft.
LENGTH	12-72", in 6" increment
TOTAL WIDTH	1.21' FIXED CLIP
TOTAL HEIGHT	0.82" (not including clip)
INPUT CURRENT	54mA @ 120V 24mA @ 277V
MOUNTING	Fixed, Hinge
AVAILABLE OPTICS	10°, 15°x40°, 120°
FINISH	Anodized Aluminum
COLOR OPTIONS	RGBW, 2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K, Red, Blue, Amber, Green
TOTAL LINEAR FT. PER POWER FEED	40ft. @ 120V
COLOR RENDERING INDEX WHITE ONLY (CRI)	90 + CRI
ENVIRONMENTAL	Operating temperature--40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity
RATING	IP50

** Military spec available under special request-lead times may be impacted.

MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.

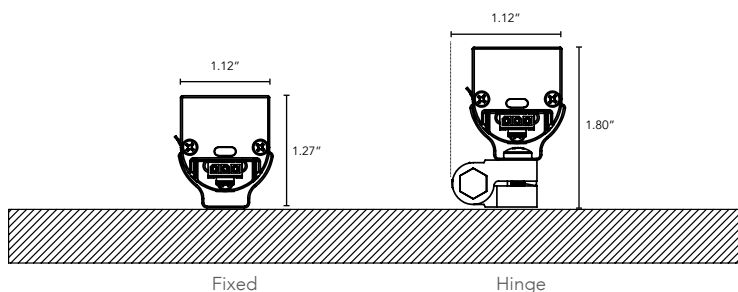


OUTPUT:

Color Temperature (K)	Wattage	Lumens	LM/W
2000	6	365	61
2400	6	470	79
2700	6	560	94
3000	6	695	116
3500	6	760	127
4000	6	800	134


ACCESSORY:

Track Mount Clip System is only available with Fixed Mounting.

Plan View

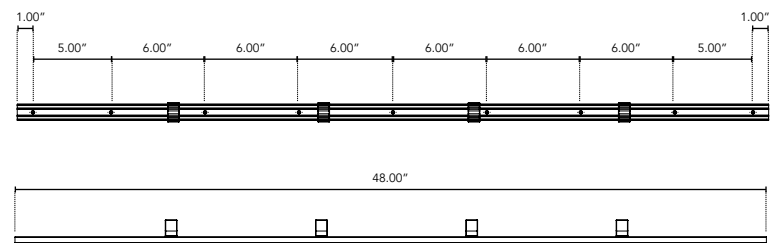

Elevation View



KNIFE EDGE COVE:

