



NICHE-RT


Micro Profile Millwork, Task & Cove Fixture

Customer:

Date:

Type:

Project:

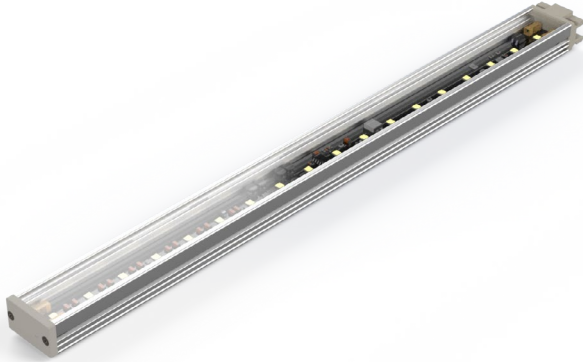

- Compact, variable light fixture for interior use
- Fixture comes in 4" increments.
- Many options in color temperature to suit a range of projects. Call factory for additional options.
- EMI Filter available upon request. Call factory for more information.
- Boca Flasher's patented CleanDim® technology ensures even dimming from 0-100%.
- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V, DALI or DMX Dimming.
- Uses standard magnetic low voltage dimming.
- Total linear feet per power feed: 10ft. Class 2 Limited (8W).
- Interior installation use only.
- Contact Boca Flasher for tips with custom installations.




PRODUCT SPECIFICATIONS:

		WATTAGE	COLOR OPTION	OPTIC	VOLTAGE	TRANSFORMER PRIMARY VOLTAGE	FINISH	LENS	MOUNTING
Niche	RT			120°	24VAC		A		F
		4W	2400K			120V	A Clear Anodized Aluminum	C Clear	F Fixed
		8W	2700K			277V		CLD Clear Light Diffused	
			3000K			(Fixture is 24VAC)		HD Heavy Diffused	
			3500K						
			4000K						
			5000K						

DIMENSIONS:

Plan View

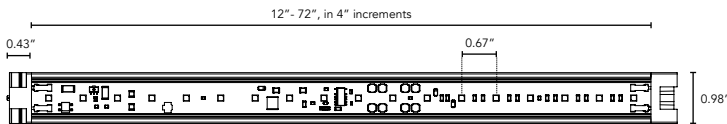

Elevation View



NICHE-RT

Micro Profile Millwork, Task & Cove Fixture

TECHNICAL SPECIFICATIONS:


WATTAGE	4 or 8 watts per linear ft.
INPUT VOLTAGE	24VAC
CONTROL	Leading Edge/Trailing Edge line dimmer 0-10V, DALI, or DMX*
LED SPACING	5/8" on center
LENGTH	12"-72" in 4" increments, allow 1/4" for each end cap and 2" for power feed cable
TOTAL HEIGHT	0.59" (not including clip)
TOTAL WIDTH	0.91"
COLOR OPTIONS	2400K, 2700K, 3000K, 3500K, 4000K, 5000K
MOUNTING	Fixed
AVAILABLE OPTICS	120°
RATING	Interior Only
COLOR RENDERING INDEX (CRI)	90 + CRI
TRANSFORMER TYPE	Magnetic Low Voltage
ENVIRONMENTAL	Operating temperature--40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Uses Boca SDS Module for 0-10V, Dali, or DMX Dimming.

* Military spec available under special request-lead times may be impacted.

MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.



LUMINAIRE INFORMATION:

IES Files Pending

- Specific Files Available On Request