



- L bracket or magnetic mounting makes installation easy.
- Vacancy/occupancy sensors ensure fixture is energy efficient. User can select either vacancy or occupancy on sensor.
- Sensor range of either 85° or 120°.
- Many options in color temperature to suit a range of projects.
- Available for temporary or permanent installation.
- Boca Flasher's patented CleanDim® technology ensures even dimming from 0-100%.
- Fixture comes with diffused lens standard. Call Boca Flasher for more options.
- Clean Light option allows temporary light output boost.
- Interior installations only.
- Maximum of 30 LED boards per power feed.




PRODUCT SPECIFICATIONS:

Task	COLOR OPTION	VOLTAGE	FINISH	OCCUPANCY / VACANCY SENSOR	MOUNTING	WIRING	OPTION
			W				
S Satellite	2700K	120V	W White	NS No Sensor	MB Magnetic Bars This option is not available with hardwiring (HW)	EP Three Prong Plug	
M Master (Masters have on/off dimming & optional occ/vac sensor)	3000K	277V		85° 85° x 75°	LB L-Shaped Bracket	HW Hardwired	
	3500K			120° 120° x 90°			
	4000K						
	5000K						

DIMENSIONS:

Plan View

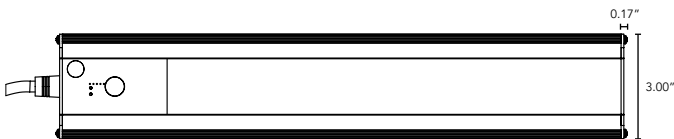

Elevation View



TASK

Shallow Profile LED Fixture


TECHNICAL SPECIFICATIONS:

WATTAGE / FOOT	ON: 10W / Mid: 5W / Lo: 3W Clean Boost: 15 (20 minute time out on CB)
INPUT VOLTAGE	90-120VAC 230-277VAC
INPUT CURRENT	Model Dependent
CONTROL	Integral touch dimmer, vacancy / occupancy sensor standard*
LED SPACING	1" x 1.5" on center
LENGTH	Master fixture 16" - 88": satellite fixtures 13" - 91" 6" increments allow 1" for each L-Bracket and 2" for power feed cable.
TOTAL HEIGHT	0.85" (not including clip)
TOTAL WIDTH	3.03"
COLOR OPTIONS	2700K, 3000K, 3500K, 4000K, 5000K
MOUNTING	L-Bracket or Magnetic Bar
AVAILABLE OPTICS	120°
RATING	Interior Only
COLOR RENDERING INDEX	90 + CRI
POWER CABLE	UL Standard 6 ft.
ENVIRONMENTAL	Operating temperature--40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Control on Master Units Only


* Military spec available under special request-lead times and cost may be impacted.

FIXTURE INFORMATION:

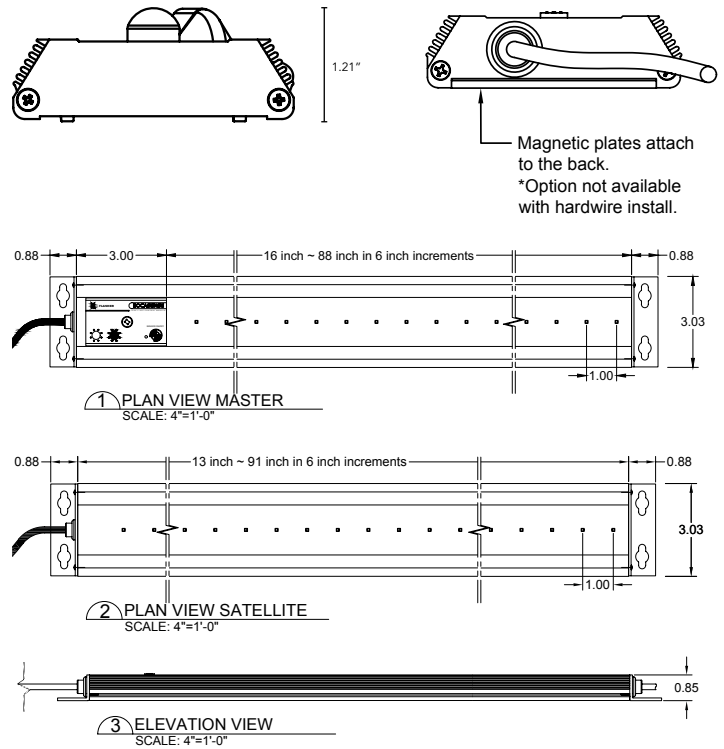

LUMINAIRE INFORMATION:

LUMINOUS INTENSITY DISTRIBUTION CURVE

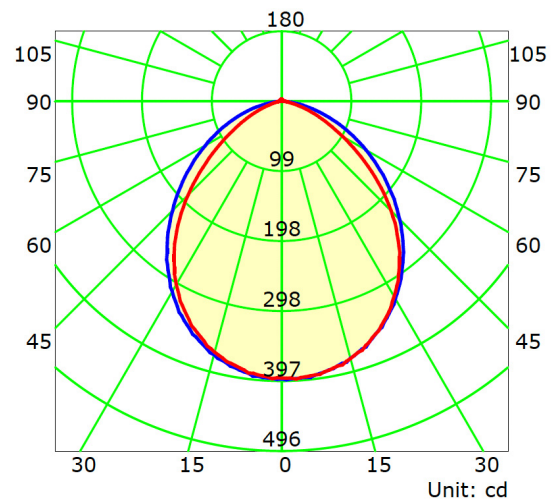

LUMEN DATA PER FOOT - 3000K

INITIAL ON-10W-Total Rated Lamp Lumens: 913.5 lm
MID-5W-Total Lamp Lumens: 398.6 lm
LOW-3W-Total Lamp Lumens: 276.5 lm
CLEAN BOOST-15W-Total Lamp Lumens: 1136.4 lm

LLF:
2700K-.90
3500K-1.2
4000K-1.4
5000K-1.6