



- Compact, variable light fixture.
- Fixture comes in 6" increments with a 12" minimum.
- Boca Flasher's patented CleanDim® technology ensures even dimming from 0-100%.
- Many options in color temperature to suit a range of projects.
- Uses standard line voltage dimming.
- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V DALI or DMX Dimming.
- Interior installations only.
- The housing is a high temperature ABS plastic with a durable white or black finish, making it temperature and abrasion resistant.
- Total linear feet per power feed (6W): 120V = 80 ft., 277V = 150 ft.
- Contact Boca Flasher for tips with custom installation procedures.

PRODUCT SPECIFICATIONS: MUST COMPLETE THE QUICKSHIP ORDERING GUIDE (SEE PAGE 3)

	WATTAGE	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS	BAFFLE	REFLECTOR <small>(Only Available with 120° Optics)</small>	QS
Nanolume	3W	2000K	120V	10°	W White	S Swivel	C Clear	SQ Square	Y Yes	QS Quickship
	6W	2400K	277V	15°x 40°	B Black	H Hinge	CLD Clear Light Diffused <small>(Not Available with Optics)</small>	ASYM Asymmetric	N No	
		2700K		120°			HD Heavy Diffused <small>(Not Available with Optics)</small>			
		3000K								
		3500K								
		4000K								

Quick Ship Terms:

- Orders Must be Received by 12pm EST
- Quick Ship Fixtures are Interior Use Only.
- Only Lengths of 500 Ft. or Less Can Be Ordered.
- No Custom Modifications are Available, Only the Standard Qualifies.
- Any Delays In Approvals May Void Quick Ship Possibility.
- Errors/Omissions will be Sole Responsibility of Purchaser.
- Additional Costs May Apply.
- Minimum Orders Will Apply.
- Subject to All Standard Approvals.
- All Orders Subject to All Boca Flasher Terms and Conditions.

Nanolume Order Terms:

- Lead Time: **5 Business Days After Approvals**
- (1) Power feed and (1) Terminator Included per 43 feet
- 2 Clips included per less than 48" lengths and 3 Clips included per on 48" & 72" lengths

NANOLUME Quick Ship

Micro Profile LED Task and Cove Fixture



TECHNICAL SPECIFICATIONS:

WATTAGE	3 or 6 watts per linear ft.
INPUT VOLTAGE	90-120V 230-277V
CONTROL	Leading Edge/Trailing Edge line dimmer 0-10V*, DALI*, DMX*
LED SPACING	5/8" on center
LENGTH	12-72", in 6" increment allow 1/4" for each end cap and 1.25" for power feed cable
TOTAL WIDTH	1.04"
TOTAL HEIGHT	0.82"
COLOR OPTIONS	2000K, 2400K, 2700K, 3000K, 3500K, 4000K
MOUNTING	Swivel, Hinge
AVAILABLE OPTICS	10°, 15°x40°, 120°
COLOR RENDERING INDEX (CRI)	90 + CRI
RATING	Interior Only IP50

*Uses Boca SDS Module for 0-10V, Dali, or DMX Dimming.


LUMINAIRE INFORMATION:

CCT (K)	Wattage	Lumens	LPW
2000	6	432	72
2400	6	510	85
2700	6	560	94
3000	6	588	98
3500	6	618	103
4000	6	636	106


* Typical delivered lumen data is approximate. Actual lumens will vary due to installation environment and beam pattern. Please see IES files.

DIMENSIONS:

Plan View

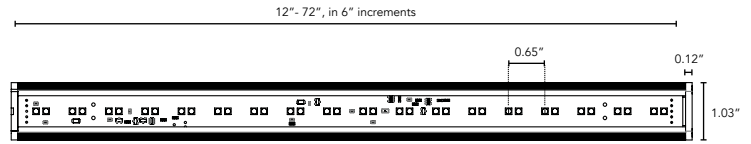


Elevation View

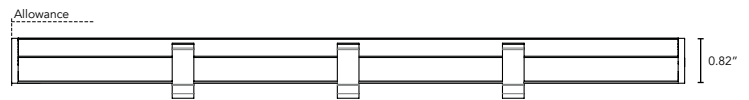


*Third Clip Required for 48" and Larger Fixtures

End View

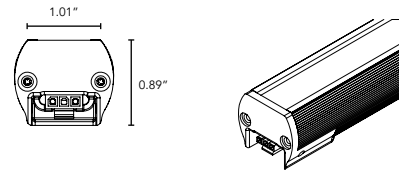

MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.

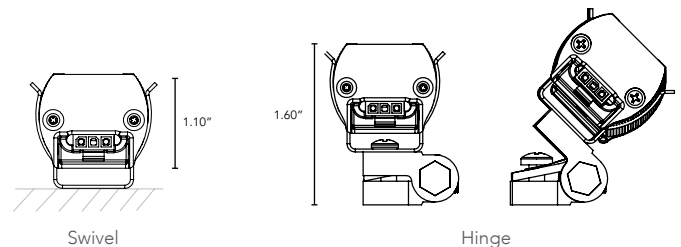



Nanolume - QuickShip

ORDER GUIDE

Customer:

Date:

PO:

Project:

Distributor:

TYPE	LENGTH 6" Increments	QUANTITY		WATTAGE	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS	BAFFLE	REFLECTOR <small>(Only Available with 120" Optics)</small>
			Nanolume									QS
			Nanolume									QS
			Nanolume									QS
			Nanolume									QS
			Nanolume									QS
			Nanolume									QS
			Nanolume									QS

Additional Power Feeds/End Caps Needed? Fill In Quantity, Additional Costs May Apply:

Project Notes:

Nanolume Order Terms:

- Lead Time: 5 Business Days After Approvals
- (1) Power feed and (1) Terminator Included per 43 feet
- 2 Clips included per less than 48" and 3 Clips included per on 48" & 72"

Quick Ship Terms:

- Orders Must be Received by 12pm EST
- Quick Ship Fixtures are Interior Use Only.
- Only Lengths of 500 Ft. or Less Can Be Ordered.
- No Custom Modifications are Available, Only the Standard Qualifies.
- Any Delays In Approvals May Void Quick Ship Possibility.
- Errors/Omissions will be Sole Responsibility of Purchaser.
- Additional Costs May Apply.
- Minimum Orders Will Apply.
- Subject to All Standard Approvals.
- All Orders Subject to Boca Lighting and Controls Terms and Conditions.

Boca Lighting and Controls, Inc. 508 South Military Trail, Deerfield Beach, Florida 33442 USA Phone: 561.989.5338 Fax: 561.982.8323 © 2023 Boca Flasher, Inc

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Lighting and Controls sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. NANOLUME meets or exceeds Title 24 Compliance. >45 Lumens per Watt. For additional information and details visit our website at www.boca.lighting. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners.