

- Compact, variable light fixture.
- Fixture comes in 6" increments with a 12" minimum.
- Boca's patented CleanDim® technology ensures even dimming from 0-100%.
- Standard range shifts the color temperature from 3000K to 2000K as the fixture is dimmed.
- Designer selectable color ranges to suit a variety of projects, call factory for additional options.
- Uses standard line voltage dimming.
- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V, Dali or DMX Dimming.
- Interior installations only.
- Total linear feet per power feed; 76 ft. @ 120V or 156ft. @ 277V
- Contact Boca Flasher for tips with custom installation procedures.

PRODUCT SPECIFICATIONS: MUST COMPLETE THE QUICKSHIP ORDERING GUIDE (SEE PAGE 3)

	WATTAGE	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS	BAFFLE <small>(Not Available with 10° Optics)</small>	REFLECTOR	QS
Nano Warm Dim	6W	2000K-3000K <small>(Contact Factory for other Options)</small>	120V 277V	10° 15°x40° 120°	W White B Black	F Fixed H Hinge	C Clear CLD Clear Light Diffused <small>(Not Available with Optics)</small> HD Heavy Diffused <small>(Not Available with Optics)</small>	SQ Square ASYM Asymmetric	N No Y Yes <small>(Not Available with Optics)</small>	QS Quickship

Quick Ship Terms:

- Orders Must be Received by 12pm EST
- Quick Ship Fixtures are Interior Use Only.
- Only Lengths of 500 Ft. or Less Can Be Ordered.
- No Custom Modifications are Available, Only the Standard Qualifies.
- Any Delays In Approvals May Void Quick Ship Possibility.
- Errors/Omissions will be Sole Responsibility of Purchaser.
- Additional Costs May Apply.
- Minimum Orders Will Apply.
- Subject to All Standard Approvals.
- All Orders Subject to All Boca Flasher Terms and Conditions.

Nano Warm Dim Order Terms:

- Lead Time: **10 Business Days After Approvals**
- (1) Power feed and (1) Terminator Included per 43 feet
- 2 Clips included per less than 48" lengths and 3 Clips included per on 48" & 96" lengths

NANO WARM DIM Quick Ship

Micro Profile LED Task and Cove Fixture with Warm Dim



TECHNICAL SPECIFICATIONS:

WATTAGE	6 watts per linear ft.
INPUT VOLTAGE	90-120V 230-277V
CONTROL	Leading Edge/Trailing Edge line dimmer
LED SPACING	0.65" on center
LENGTH	12-72", in 6" increment
TOTAL WIDTH	1.03"
TOTAL HEIGHT	0.82" (not including clip)
INPUT CURRENT	54mA @ 120V 24mA @ 277V
MOUNTING	Fixed, Hinge
AVAILABLE OPTICS	15×40°, 120°
FINISH OPTICS	White or Black High Temp. ABS Plastic
COLOR OPTIONS	2000K-3000K - (Contact Factory for other Options)
TOTAL LINEAR FT. PER POWER FEED	76ft. @ 120V, 156ft. @ 277V
RATING	IP50 Dry
COLOR RENDERING INDEX (CRI)	90 + CRI


LUMINAIRE INFORMATION:

IES Files Pending

· Specific Files Available On Request


MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.

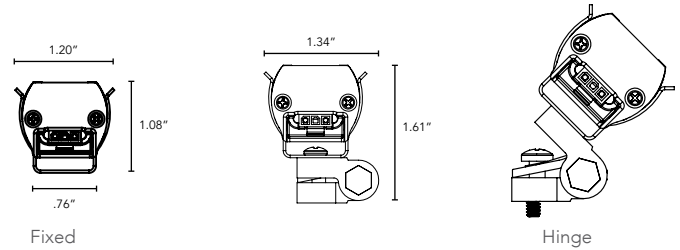

DIMENSIONS:

Plan View

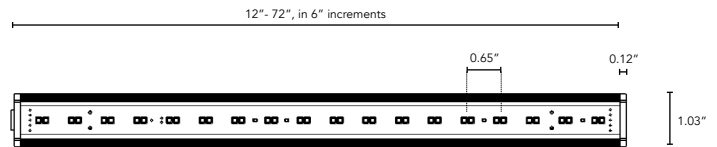

Elevation View



*Third Clip Required for 48" and Larger Fixtures