



SBL-MC

High Intensity Solid Color LED Fixture

Customer:

Date:

Type:

Project:



- Compact, variable light fixture for dry, damp, or wet location use.
- Fixture comes in 1ft, 2ft and 4ft options.
- Many options in optics, color temperature and accessories to suit a range of projects. Call factory for additional options.
- Boca Flasher's patented CleanDim® technology ensures even dimming from 0-100%.
- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V, DALI, or DMX Dimming.
- EMI Filter integral.
- Simple installation using conventional wiring.
- Contact Boca Flasher for tips with custom installations.




PRODUCT SPECIFICATIONS:


COLOR OPTION		OPTIC	VOLTAGE	FINISH	LOCATION	MOUNTING	OPTION
SBL	MC			A			
	2700K	10°	120V	A Clear Anodized Aluminum	I Interior-IP50	F Fixed	
	3000K	30°	277V		E Exterior-IP65	S Swivel	
	3500K	60°			W Wet-IP68		
	4000K	10°x60°					
	5000K	30°x60°					
	Amber	120°					
	Red						
	Green						
	Blue						

DIMENSIONS:


Plan View

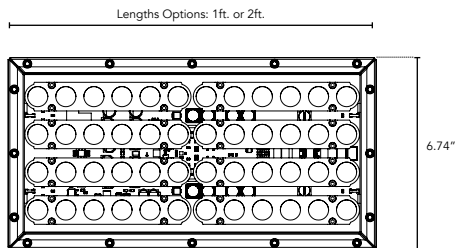

Elevation View



End View

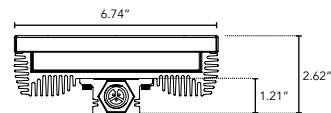

Boca Flasher, Inc. 508 South Military Trail, Deerfield Beach, Florida 33442 USA Phone: 561.989.5338 Fax: 561.982.8323 © 2017 Boca Flasher, Inc

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Flasher sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. SBL-MC meets or exceeds Title 24 Compliance. >45 Lumens per Watt. For additional information and details visit our website at www.bocaflasher.com. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners.

REV 02282023

SBL-MC

High Intensity Solid Color LED Fixture

TECHNICAL SPECIFICATIONS:


WATTAGE	48 watts per linear ft.
INPUT VOLTAGE	90-120VAC 230-277VAC
CONTROL	Leading Edge/Trailing Edge line dimmer 0-10V, DALI or DMX*
LED SPACING	1" x 1.5" on center
LENGTH	1ft, 2 ft, 3 ft
TOTAL HEIGHT	2.62"
TOTAL WIDTH	6.74"
COLOR OPTIONS	2700K, 3000K, 3500K, 4000K, 5000K, Amber, Red, Green, Blue
MOUNTING	Fixed or Swivel
AVAILABLE OPTICS	10°, 30°, 60°, 10°x60°, 30°x60°, 120°
RATING	IP50, IP65, IP68
COLOR RENDERING INDEX (CRI)	90 + CRI
POWER CABLE	UL Standard 10 ft.
ENVIRONMENTAL	Operating temperature--40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Use Boca SDS module for 0-10V or DMX Dimming.

* Military spec available under special request-lead times may be impacted.

MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.

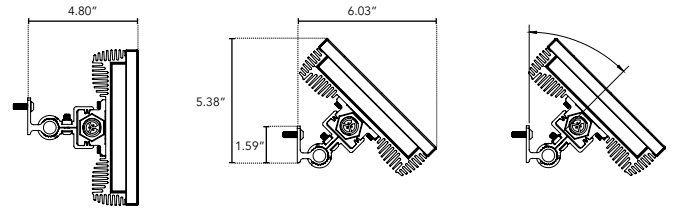

LUMINAIRE INFORMATION:

IES Files Pending

- Specific Files Available On Request