

DATE:	TYPE:	PROJECT:	CUSTOMER:




Direct View Linear LED Strip Fixture

Dimmable, solid color low voltage fixture fabricated with a variety of options. The Boca Lumeline is a shallow profile fixture well suited for direct view applications. Boca's patented CleanDim® technology ensures even dimming from 0-100%. The Lumeline can be fabricated with a range of color temperature choices, affording a multitude of distribution and effect options. The housing is anodized aluminum with a durable finish making it weather and abrasion resistant. It is UL Listed for interior, exterior and wet applications (model dependant).

KEY FEATURES:

- Compact, variable light fixture for dry, damp or wet location use.
- Fixture comes in 6" increments (12" minimum).
- Four different types of lenses.
- Uses standard line voltage dimmers.
- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V or DMX Dimming.
- Clear anodized aluminum or black finish.
- Total linear feet per power feed: 56 ft. @ 120V or 120 ft. @ 277V.


LENS OPTIONS:



Diffused

Key Features


- Interior or exterior use
- Lens is 1/8" (.09) thick, adds 1/16" to overall height.



Satin Ice White

Key Features

- Interior use only.
- Best for direct view use
- Lens is 1/4" (.25) thick, adds 1/8" to overall height.



Opal White

Key Features

- Exterior use only.
- Best for direct view use
- Lens is 1/4" (.25) thick, adds 1/8" to overall height.

*Additional charges may apply.

TECHNICAL SPECIFICATIONS:

WATTAGE: 4 or 8 watts per linear ft.	TOTAL WIDTH: 1.68"
INPUT VOLTAGE: 90-120VAC	TOTAL HEIGHT: Not including clip 1.04" or 1.75" with opal white lens.
CONTROL: Leading-edge/Trailing-edge line dimmer, 0-10V, DMX*	MOUNTING: Fixed, swivel, 3" arc or 6" arc.
POWER CABLE: UL standard 6 ft.	COLOR OPTIONS: 2700K, 3000K, 3500K, 4000K, 5000K
LED SPACING: 0.66" on center.	OPTICS AVAILABLE: 120°
LENGTH: 6" increments (12" max) allow 1/4" for each end cap and 2" for power feed cable.	RATING: IP50, IP65, IP68
	COLOR RENDERING INDEX (CRI): 90 + CRI

*Use Boca SDS module for 0-10V or DMX Dimming.

PROJECT SPECIFICATIONS:

Lumeline	—	WATTAGE: 4 watts= 4W 8 watts= 8W	—	COLOR OPTION: 2700K, 3000K, 3500K, 4000K, 5000K	—	120°	—	120V
FINISH: Clear Anodized Aluminum = A Black = B	—	LOCATION: Interior = I Exterior (IP65) = E Wet (IP68) = W	—	MOUNTING: Fixed = F Swivel = S 3" Arc Swivel = 3Arc 6" Arc Swivel = 6Arc	—	LENS: Clear = C Diffused Lens = D Satin Ice White = SI* Opal White = OW**	—	OPTIONS: Hexcell Louver = HL* Square Baffle = SB Slanted Baffle = SSB Square Kicker Baffle = SKB
						*Interior Use Only **Exterior Use Only		*Cannot be used with Satin Ice White or 120° optic

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Flasher sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. Lumeline meets or exceeds Title 24 Compliance. >45 Lumens per Watt. For additional information and details visit our website at www.bocafletcher.com. All products proudly manufactured in the USA. Boca Flasher, Inc. 508 South Military Trail, Deerfield Beach, Florida 33442 USA Phone: 561.989.5338 Fax: 561.982.8323 © 2017 Boca Flasher, Inc. All rights reserved. All names and trademarks are property of their respective owners. REV 04-2018




DATE:	TYPE:	PROJECT:	CUSTOMER:

DIAGRAMS & DIMENSIONS


BODY CHOICES | Power feed dependent

STANDARD END FEED

PLAN VIEW

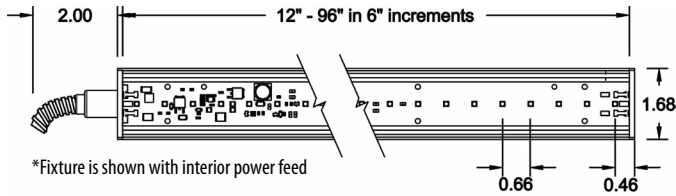

ELEVATION VIEW

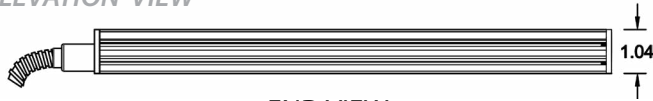


END VIEW




BOTTOM FEED*

MOUNTING INFORMATION:

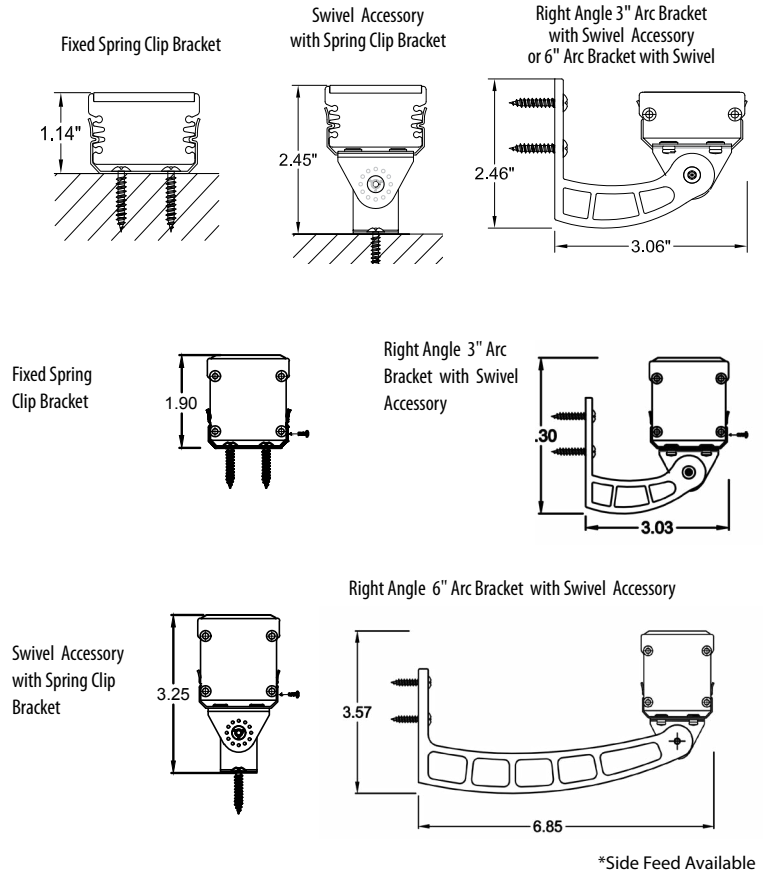

Bottom Power feed - Side View

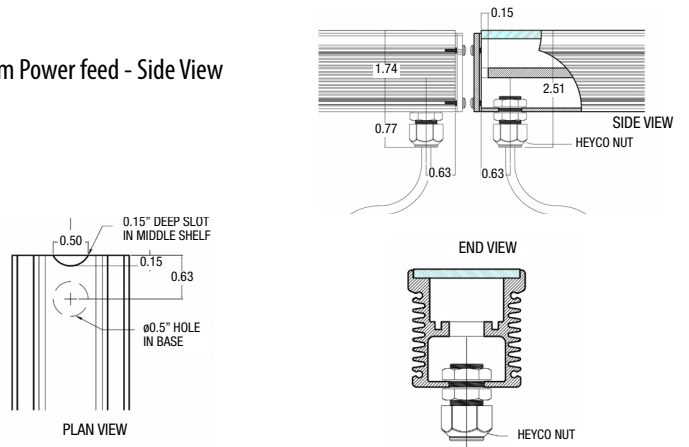

* For vertical installation please contact the factory for specific mounting instructions.