

# Lumeline-RT

DATE:	TYPE:	PROJECT:	CUSTOMER:



## Direct View Linear LED Strip Fixture


Dimmable, solid color low voltage fixture fabricated with a variety of options. The Boca Lumeline is a shallow profile fixture well suited for direct view applications. Boca's patented CleanDim® technology ensures even dimming from 0-100%. The Lumeline can be fabricated with a range of color temperature choices, affording a multitude of distribution and effect options. The housing is anodized aluminum with a durable finish making it weather and abrasion resistant. It is UL Listed for interior, exterior and wet applications (model dependant).

### KEY FEATURES:


- Compact, variable light fixture for dry, damp or wet location use.
- Fixture comes in 6" increments (12" minimum).
- Many options in color temperature and accessories to suit.
- Uses standard line voltage dimmers.
- Total linear feet per power feed: 8 feet. Class 2 limited.
- Fixture dims with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V or DMX Dimming.
- Clear anodized aluminum or black finish.
- Contact Boca Flasher for tips with custom installations.

### DIAGRAMS & DIMENSIONS:

#### PLAN VIEW

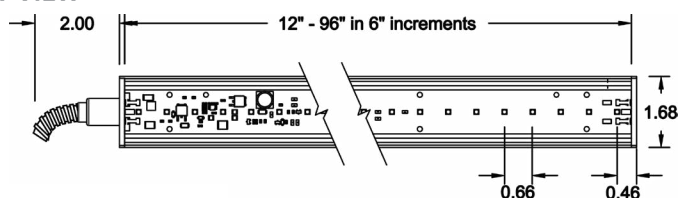


#### ELEVATION VIEW



\*Fixture is shown with interior power feed.

### MOUNTING INFORMATION:

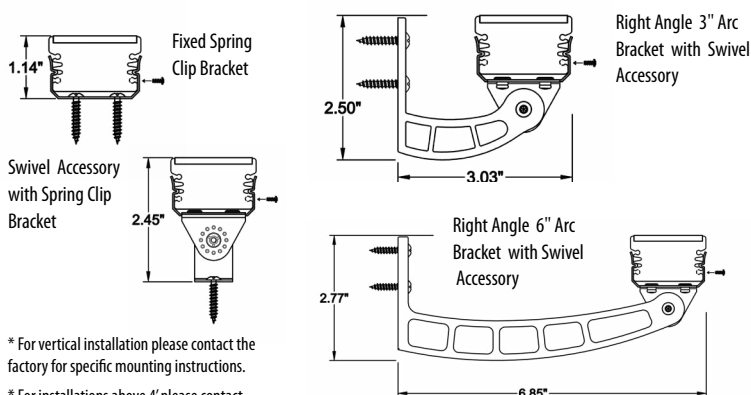

\* For vertical installation please contact the factory for specific mounting instructions.

\* For installations above 4' please contact the factory.

### TECHNICAL SPECIFICATIONS:

<b>WATTAGE:</b> 8 watts per linear ft.	<b>TOTAL WIDTH:</b> 1.68"
<b>INPUT VOLTAGE:</b> 24VAC	<b>TOTAL HEIGHT:</b> Not including clip 1.04"
<b>CONTROL:</b> Standard magnetic low voltage dimming.	<b>MOUNTING:</b> fixed, swivel, 3" arc or 6" arc.
<b>POWER CABLE:</b> UL standard 6 ft.	<b>COLOR OPTIONS:</b> 2700K, 3000K, 3500K, 4000K, 5000K
<b>LED SPACING:</b> 0.63" on center.	<b>OPTICS AVAILABLE:</b> 120°
<b>LENGTH:</b> 6" increments (12" max) allow 1/4" for each end cap and 2" for power feed cable.	<b>RATING:</b> IP50, IP65, IP68
	<b>COLOR RENDERING INDEX (CRI):</b> 90 + CRI

### PROJECT SPECIFICATIONS:

Lumeline-RT	8W		120°	24VAC
	WATTAGE: 8watts= 8W	COLOR OPTION: 2700K, 3000K, 3500K, 4000K, 5000K	OPTIC: 120°	FIXTURE VOLTAGE:
FINISH: Clear Anodized Aluminum =A Black = B	PRIMARY TRANSFORMER VOLTAGE: 120V, 230V, 277V (Fixture is 24VAC)	LOCATION: Interior = I Exterior (IP65) = E Wet (IP68) = W	MOUNTING: Fixed = F Swivel = S 3" Arc Swivel = 3Arc 6" Arc Swivel = 6Arc	LENS: Clear = C Diffused Lens = D Satin Ice White = SI* Opal White = OW** *Interior Use Only **Exterior Use Only

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Flasher sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. Lumeline-RT meets or exceeds Title 24 Compliance. >45 Lumens per Watt. For additional information and details visit our website at [www.bocaflasher.com](http://www.bocaflasher.com). All products proudly manufactured in the USA. Boca Flasher, Inc. 508 South Military Trail, Deerfield Beach, Florida 33442 USA Phone: 561.989.5338 Fax: 561.982.8323 © 2017 Boca Flasher, Inc. All rights reserved. All names and trademarks are property of their respective owners. REV 02-2018

