




**1 PLAN VIEW**  
SCALE: 3"=1'-0"

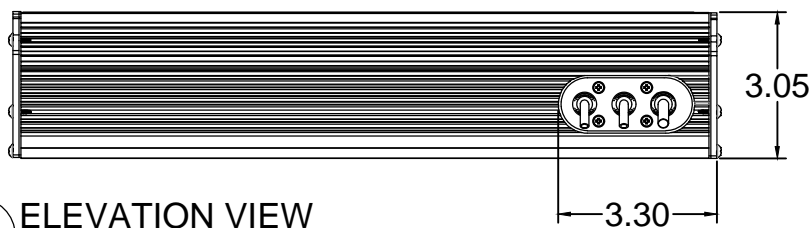

**2 ELEVATION VIEW**  
SCALE: 3"=1'-0"

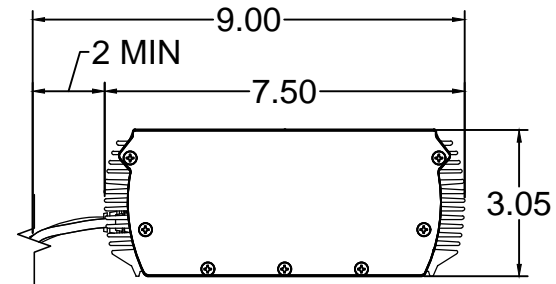

**3 END CAP**  
SCALE: 3"=1'-0"

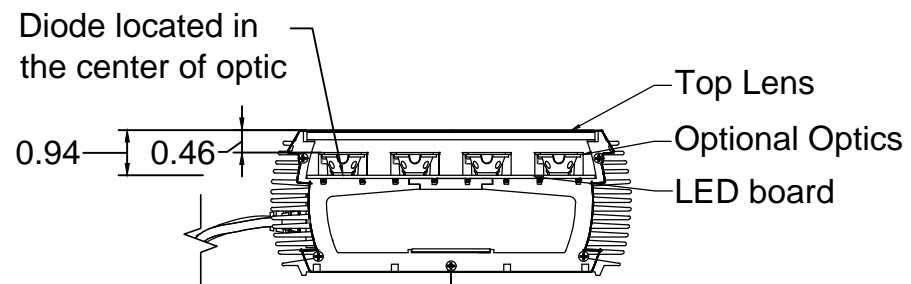


**4 SECTION**  
SCALE: 3"=1'-0"

## TECHNICAL DATA

Wattage	64 watts per linear ft.
Input Voltage	Line Voltage, 90-120V or 230-277V
Input Current	590mA @ 120V, 255mA @ 277V RMS per linear ft
Control	Standard 512 DMX, Wireless DMX
Power Cable Length	UL Standard 6ft (DMX 5ft in/out)
LED Spacing, per strip	1" on center
Fixture Length	1ft, 2ft, or 4ft
Fixture Width	7.50"
Total Height (not including clip)	3.05"
Mounting	Swivel and Large Swivel Bracket
Available Optics	10°, 24°, 36°, 10°x45° (r, g, b), 120°
Finish Options	Clear Anodized Aluminum
Color Options	RGB or White Mixing
Color Rendering Index (CRI)	95 CRI (WM)
Ratings	Dry, IP65, IP68
Total linear ft per 20A breaker	30ft @ 120V, 60ft @ 277V
Total linear ft per 15A breaker	25ft @ 120V, 45ft @ 277V
Total linear ft per Power Feed	Power Feed Wire Gauge Dependent
Transformer	No transformer required. Fixture is Line Voltage

## MOUNTING

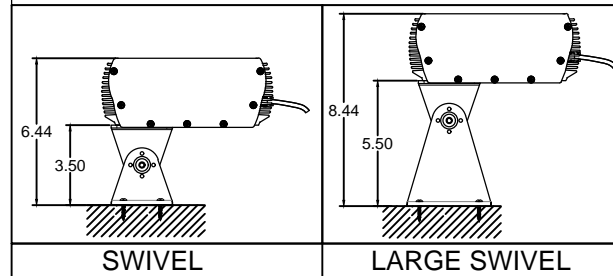

LED Lighting Systems, Technologies & Manufacturing

508 SO. MILITARY TRL. DEERFIELD BEACH, FL 33442  
www.bocaflasher.com (561) 989-5338

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.

## SBL-MIX

FILE NAME:	TECHNICAL SHEET	PART #:	SBL-MIX
DRAWN BY:	STEPHANIE BURKE		02 / 11 / 14
DESIGN BY:	LUIS ROSADO		
APPROVED BY:	ANGELA TODD		
SCALE:	NTS	SHEET:	1 OF 1