



1 PLAN VIEW
SCALE: 6"=1'-0"

2 ELEVATION VIEW
SCALE: 6"=1'-0"




3 END CAP
SCALE: 6"=1'-0"

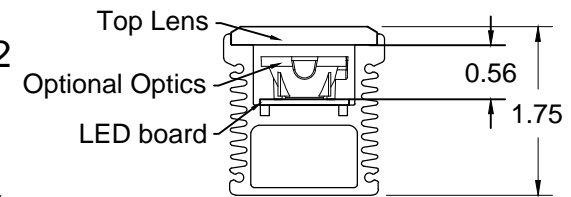


4 SECTION
SCALE: 6"=1'-0"


MOUNTING OPTIONS




FIXED



3" ARC




SWIVEL




6" ARC


END CAP CONDITIONS




POWER FEED (PF)




CLOSED END (CE)




FEMALE (F)



MALE (M)



TWIST LOCK FEMALE (TL)



TWIST LOCK MALE (TL)

TECHNICAL DATA

Parameter	Data
Power	16 watts per linear ft
Input Voltage	90-120V or 230-277V
Input Current per Linear Ft	136mA@120V or 60mA@277V RMS per linear foot
Control	Leading-edge Trailing-edge Line Dimmer
Power Cable Length	UL Standard 6ft
LED Spacing, per strip	1" on center
Fixture Length	12"-96", in 6" increments
Fixture Width	1.68"
Total Height (not including clip)	1.75"
Mounting	Fixed, Swivel, 3" Arc Bracket & 6" Arc Bracket
Available Optics	10°, 30°, 60°, 10°x60°, 30°x60°, 120°
Finish Options	Clear or Black Anodized Aluminum
LED Color Options	27K,3K,35K,4K,5K,Amber,Red,Green,Blue
Color Rendering Index	90+ CRI
Ratings	Dry, IP65, IP68
Total linear ft per 20A breaker	80ft@120V or 180ft@277v
Total linear ft per 15A breaker:	60ft@120V or 135ft@277v
Total linear ft per power feed	36ft@120V or 80ft@277v
Transformer	N/A



508 So. Military Tr. DEERFIELD BEACH, FL 33442
www.bocaflasher.com (561) 989-5338

HPNLS - HO

FILE NAME:	TECHNICAL SHEET	PART #:	HPNLS-HO
DRAWN BY:	STEPHANIE BURKE		04 / 18 / 13
DESIGN BY:	LUIS ROSADO		
APPROVED BY:	ANGELA TODD		
SCALE:	NTS	SHEET:	1 OF 1

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.