

DATE:	TYPE:	PROJECT:	CUSTOMER:



Direct View Linear LED Strip Fixture


Dimmable, solid color low voltage fixture fabricated with a variety of options. The Boca Lumeline is a shallow profile fixture well suited for direct view applications. Boca's patented CleanDim® technology ensures even dimming from 0-100%. The Lumeline can be fabricated with a range of color temperature choices, affording a multitude of distribution and effect options. The housing is anodized aluminum with a durable finish making it weather and abrasion resistant. It is UL Listed for interior, exterior and wet applications (model dependant).

KEY FEATURES:

- Compact, variable light fixture for dry, damp or wet location use.
- Fixture comes in 6" increments (12" minimum).
- Many options in color temperature and accessories to suit.
- Uses standard line voltage dimmers.
- Fixture are compatible with both forward and reverse phase dimming 10V, DMX dimmable.
- Clear anodized aluminum or black finish.
- Contact Boca Flasher for tips with custom installations.
- Total linear feet per power feed: 8 feet. Class 2 limited.

DIAGRAMS & DIMENSIONS:

PLAN VIEW

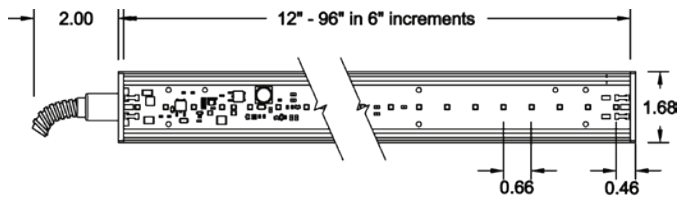


ELEVATION VIEW



*Fixture is shown with interior power feed.

MOUNTING INFORMATION:

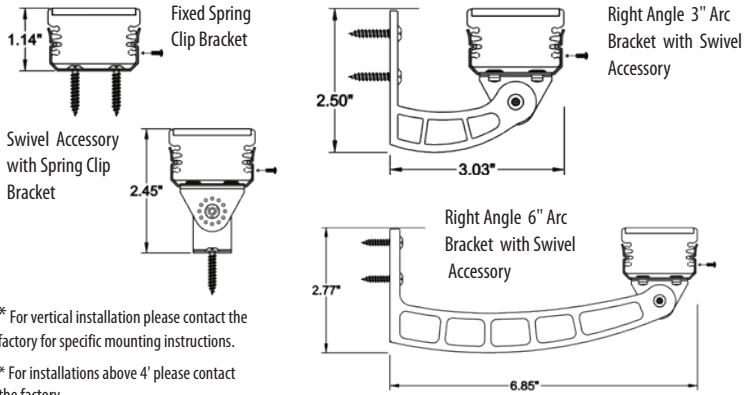

* For vertical installation please contact the factory for specific mounting instructions.

* For installations above 4' please contact the factory.

TECHNICAL SPECIFICATIONS:

WATTAGE: 8 watts per linear ft.	TOTAL WIDTH: 1.68"
INPUT VOLTAGE: 24 VAC	TOTAL HEIGHT: Not including clip 1.04".
CONTROL: Standard magnetic low voltage dimming.	MOUNTING: fixed, swivel, 3" arc or 6" arc.
POWER CABLE: UL standard 6 ft.	COLOR OPTIONS: 2700K, 3000K, 3500K, 4000K, 5000K
LED SPACING: 0.63" on center.	OPTICS AVAILABLE: 120°
LENGTH: 6" increments (12" max) allow 1/4" for each end cap and 2" for power feed cable.	RATING: IP65, IP68
	COLOR RENDERING INDEX (CRI): 90 + CRI

PROJECT SPECIFICATIONS:

Lumeline-RT	8W	120°	24 VAC
	WATTAGE:	COLOR OPTION: 2700K, 3000K, 3500K, 4000K, 5000K	OPTIC: 120°
	FIXTURE VOLTAGE:		
FINISH: Clear Anodized Aluminum = A Black = B	PRIMARY TRANSFORMER VOLTAGE: 120V, 230V, 277V (Fixture is 24 VAC)	LOCATION: Interior = I Exterior (IP65) = E Wet (IP68) = W	MOUNTING: Fixed = F Swivel = S 3" Arc Swivel = 3Arc 6" Arc Swivel = 6Arc
			LENS: Clear = C Diffused Lens = D Satin Ice White = SI* Opal White = OW** *Interior Use Only **Exterior Use Only