



- Compact, variable light fixture for dry, damp or wet location use.
- Fixture comes in 6" increments (12" minimum)
- Many options in optics, color temperature and accessories.
- Boca Flasher's patented CleanDim® technology ensures even dimming from 0-100%.
- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V or DMX dimming.
- Uses standard low voltage transformers.
- Clear anodized aluminum or black finish standard.
- Total linear feet per power feed: Voltage Dependent Class 2 limited.
- Contact Boca Flasher for tips with custom installations.




**PRODUCT SPECIFICATIONS:**


|             | WATTAGE | COLOR OPTION | OPTIC | FIXTURE VOLTAGE | FINISH                           | TRANSFORMER PRIMARY VOLTAGE | LOCATION          | MOUNTING                  | LENS                                     |
|-------------|---------|--------------|-------|-----------------|----------------------------------|-----------------------------|-------------------|---------------------------|--|
| LUMELINE-RT | 8W      |              | 120°  | 24VAC           |                                  |                             |                   |                           |  |
|             |         | 2000K        |       |                 | <b>A</b> Clear Anodized Aluminum | <b>120V</b>                 | <b>I</b> Interior | <b>F</b> Fixed            | <b>C</b> Clear                           |
|             |         | 2400K        |       |                 |                                  | <b>230V</b>                 | <b>E</b> Exterior | <b>S</b> Swivel           | <b>D</b> Diffused                        |
|             |         | 2700K        |       |                 | <b>B</b> Black                   | <b>227V</b>                 | <b>W</b> Wet      | <b>3Arc</b> 3" Arc Swivel | <b>SI</b> Satin Ice (Interior Use Only)  |
|             |         | 3000K        |       |                 |                                  | Fixture is 24VAC            |                   | <b>6Arc</b> 6" Arc Swivel | <b>OW</b> Opal White (Exterior Use Only) |
|             |         | 3500K        |       |                 |                                  |                             |                   |                           |  |
|             |         | 4000K        |       |                 |                                  |                             |                   |                           |  |
|             |         | 5000K        |       |                 |                                  |                             |                   |                           |  |

**DIMENSIONS:**

Plan View

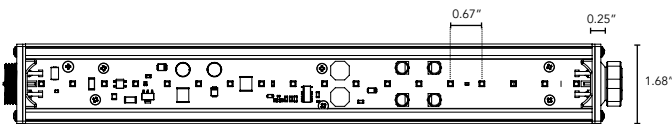

Elevation View

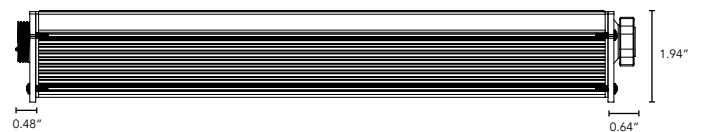

# LUMELINE-RT

Direct View Linear LED Strip Fixture





## TECHNICAL SPECIFICATIONS:

|                             |  |
|-----------------------------|--|
| WATTAGE                     | 8 watts per linear ft.   |
| INPUT VOLTAGE               | 24VAC  |
| CONTROL                     | Standard magnetic low voltage dimming  |
| LED SPACING                 | 0.67" on center  |
| LENGTH                      | 6" increments, (12" max) allow 1/4" for each end cap and 2" for power feed cable |
| TOTAL HEIGHT                | 1.04" (not including clip) or 1.75" with Opal White lens                         |
| TOTAL WIDTH                 | 1.68"  |
| COLOR OPTIONS               | 2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K                                  |
| MOUNTING                    | Fixed, Swivel, 3" Arc or 6" Arc  |
| AVAILABLE OPTICS            | 120°   |
| RATING                      | IP60, IP65, IP68   |
| COLOR RENDERING INDEX (CRI) | 90 + CRI   |
| POWER CABLE                 | UL Standard 6 ft.  |

## MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- For installation above 4' please contact the factory.

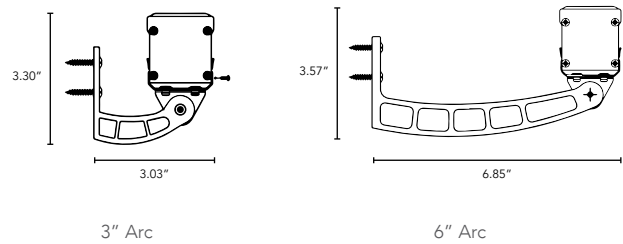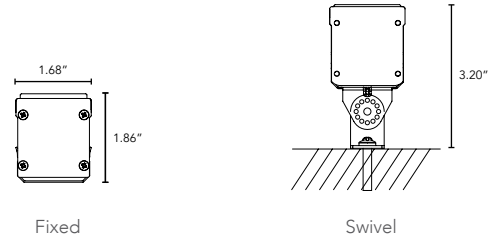

## LUMINAIRE INFORMATION:

IES Files Pending

- Specific Files Available On Request