

DATE: \_\_\_\_\_ TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_ CUSTOMER: \_\_\_\_\_



## Micro Profile LED Task and Cove Fixture


Dimmable Solid Color line voltage fixture for use as a task light or in a cove. The Boca NANOLUME is a small profile line voltage fixture well suited to cove areas where space and energy consumption are constrained. Boca's patented CleanDim® technology ensures even dimming from 0-100%. The NANOLUME can be fabricated with a range of color temperature choices, affording a multitude of options. The housing is a high temperature ABS plastic with a durable white or black finish, making it temperature and abrasion resistant.

### KEY FEATURES:


- Compact, variable light fixture.
- Fixture comes in 4" increments with a 12" minimum.
- Many options in color temperature to suit a range of projects.
- Uses standard line voltage dimming.
- Fixtures are compatible with both forward and reverse phase dimming, 0-10V, DMX dimmable.
- Interior installations only.
- Contact Boca Flasher for tips with custom installation procedures.
- Total linear feet per power feed: 120V = 80 ft., 277V = 150 ft.

### DIAGRAMS & DIMENSIONS:

PLAN VIEW

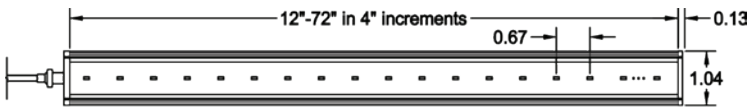


ELEVATION VIEW

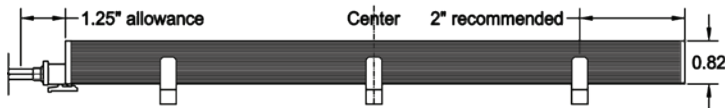

### TECHNICAL SPECIFICATIONS:

<b>WATTAGE:</b> 3 or 6 watts per linear ft.	<b>TOTAL WIDTH:</b> 1.04"
<b>INPUT VOLTAGE:</b> 90-120VAC 230-277V	<b>TOTAL DIAMETER:</b> 0.82"
<b>CONTROL:</b> Leading-edge/ Trailing-edge line dimmer 0-10V, DMX.	<b>MOUNTING:</b> Adjustable swivel clip
<b>LED SPACING:</b> 5/8" on center	<b>COLOR OPTIONS:</b> 2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
<b>LENGTH:</b> 12-72" increments, allow 1/4" for each end cap and 1.25" for power feed cable.	<b>OPTICS AVAILABLE:</b> 10°, 24°, 40°, 120°
<b>COLOR RENDERING INDEX (CRI):</b> 90 + CRI	<b>POWER CABLE:</b> UL standard 6 ft.
	<b>RATING:</b> Interior only

### MOUNTING INFORMATION:

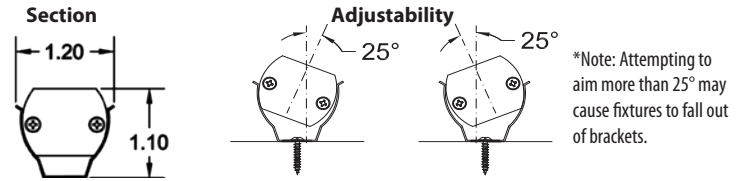

\* For vertical installation please contact the factory for specific mounting Instructions.  
\* For installations above 4' please contact the factory.

Color Temperature (K)	WATTAGE	LUMENS	LM/W
2000	6	365	61
2400	6	470	79
2700	6	560	94
3000	6	695	116
3500	6	760	127
4000	6	800	134

### PROJECT SPECIFICATIONS:

