

DATE: \_\_\_\_\_ TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_ CUSTOMER: \_\_\_\_\_



## Micro Profile Exterior LED Task and Cove Fixture

**Dimmable Solid Color Line Voltage Fixture for Exterior Use as a Task Light or in a Cove**

The Boca NANO-X is a very small-profile, line voltage fixture well suited for coves or task areas where space and energy consumption are constrained. Boca's patented CleanDim technology


ensures even dimming from 0% - 100%. The NANO-X can be fabricated with a range of color temperature choices, affording a multitude of options. The NANO-X comes in two different variations - one for interior use only, where the housing is a high temperature ABS plastic with a durable white or black finish, making it temperature and abrasion resistant, while the other variation is for exterior use and is IP65 rated, where the housing is made from a clear anodized aluminum with a durable finish, making it exterior resistant.

### KEY FEATURES:

- Compact, variable light fixture.
- Fixture comes in 1ft, 2ft, and 4 feet.
- Many options in color temperature to suit a range of projects, call factory for additional options
- Uses standard line voltage dimming.
- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V or DMX Dimming.
- Contact Boca Flasher for tips with custom installation procedures.
- Total linear feet per power feed; 76 ft. @ 120V or 156ft. @ 277V
- NanoX is Exterior IP65 rated.


### DIAGRAMS & DIMENSIONS:

#### PLAN VIEW

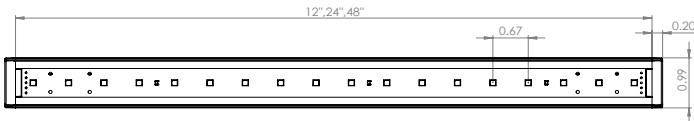


PLAN VIEW

#### ELEVATION VIEW




ELEVATION VIEW

### NANO-X:

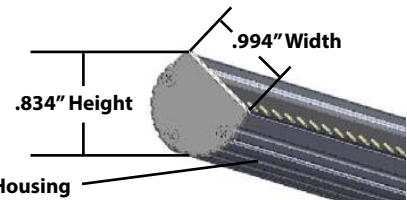

### MOUNTING INFORMATION:



\* For vertical installation please contact the factory for specific mounting instructions.

\* For installations above 4' please contact the factory.

### TECHNICAL SPECIFICATIONS:

|   |  |
|---|--|
| <b>WATTAGE:</b> 6 watts per linear ft.  | <b>TOTAL DIAMETER:</b> 0.83"   |
| <b>INPUT VOLTAGE:</b> 90-120V<br>230-277V   | <b>INPUT CURRENT:</b> 54mA @ 120V<br>24mA @ 277V                                 |
| <b>CONTROL:</b> Leading-edge/Trailing-edge line dimmer  | <b>MOUNTING:</b> Fixed clip  |
| <b>POWER CABLE:</b> UL standard 6 ft.   | <b>COLOR OPTIONS:</b> 2000K, 2400K, 2700K<br>3000K, 3500K, 4000K<br>5000K, 6500K |
| <b>PIXEL SPACING:</b> 5/8" on center  | <b>OPTICS AVAILABLE:</b> 120°  |
| <b>LENGTH:</b> 1 ft., 2ft., and 4 ft,<br>allow 1/4" for each end cap and 1.25" for power feed cable | <b>RATING:</b> Dry, Exterior   |
| <b>TOTAL WIDTH:</b> 1.00"   | <b>COLOR RENDERING INDEX (CRI):</b> 90 + CRI                                     |

### PROJECT SPECIFICATIONS:

