


DATE: _____ TYPE: _____ PROJECT: _____ CUSTOMER: _____

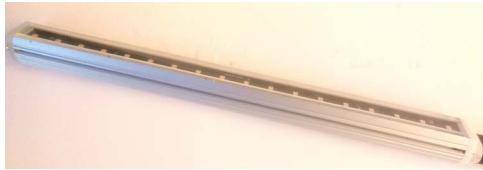

Micro Profile Exterior LED Task and Cove Fixture

Dimmable Solid Color Line Voltage Fixture for Exterior Use as a Task Light or in a Cove


The Boca NANO-X is a very small-profile, line voltage fixture well suited for coves or task areas where space and energy consumption are constrained. Boca's patented CleanDim technology ensures even dimming from 0% - 100%. The NANO-X can be fabricated with a range of color temperature choices, affording a multitude of options. The NANO-X comes in two different variations - one for interior use only, where the housing is a high temperature ABS plastic with a durable white or black finish, making it temperature and abrasion resistant, while the other variation is for exterior use and is IP65 rated, where the housing is made from a clear anodized aluminum with a durable finish, making it exterior resistant.

KEY FEATURES:

- Compact, variable light fixture.
- Fixture comes in 1ft, 2ft, and 4 feet.
- Many options in color temperature to suit a range of projects, call factory for additional options
- Uses standard line voltage dimming.
- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V or DMX Dimming.
- Contact Boca Flasher for tips with custom installation procedures.
- Total linear feet per power feed; 76 ft. @ 120V or 156ft. @ 277V
- NanoX is Exterior IP65 rated.


DIAGRAMS & DIMENSIONS:

PLAN VIEW

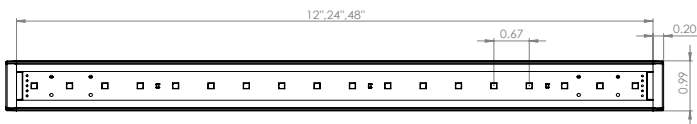


PLAN VIEW

ELEVATION VIEW




ELEVATION VIEW

NANO-X:

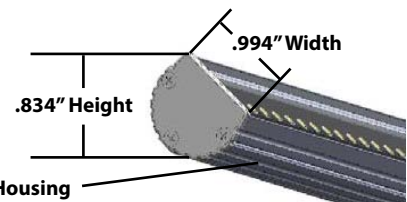

Anodized Aluminum Housing

MOUNTING INFORMATION:



* For vertical installation please contact the factory for specific mounting instructions.

* For installations above 4' please contact the factory.

TECHNICAL SPECIFICATIONS:

WATTAGE: 3 or 6 watts per linear ft.	TOTAL DIAMETER: 0.83"
INPUT VOLTAGE: 90-120V 230-277V	INPUT CURRENT: 54mA @ 120V 24mA @ 277V
CONTROL: Leading-edge/Trailing-edge line dimmer	MOUNTING: Fixed clip
POWER CABLE: UL standard 6 ft.	COLOR OPTIONS: 2000K, 2400K, 2700K 3000K, 3500K, 4000K 5000K, 6500K
PIXEL SPACING: 5/8" on center	OPTICS AVAILABLE: 120°
LENGTH: 1 ft., 2ft., and 4 ft, allow 1/4" for each end cap and 1.25" for power feed cable	RATING: Dry, Exterior
TOTAL WIDTH: 1.00"	COLOR RENDERING INDEX (CRI): 90 + CRI

PROJECT SPECIFICATIONS:

