




- Compact, variable light fixture for dry, damp or wet location use.
- Fixture comes in 6" increments (12" minimum)
- Many options in optics, color temperature and accessories.
- Four different types of lenses.
- Boca Flasher's patented CleanDim® technology ensures even dimming from 0-100%.
- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V DALI or DMX dimming.
- Uses standard line voltage dimmers.
- White or black finish standard.
- Total linear feet per power feed: 56 ft. @ 120V or 120 ft. @ 277V.
- Contact Boca Flasher for tips with custom installations.



PRODUCT SPECIFICATIONS:

	WATTAGE	COLOR OPTION	OPTIC	VOLTAGE	FINISH	LOCATION	MOUNTING	LENS	OPTIONS
LUMELINE			120°						
	4W	2000K		120V	W White	I Interior-IP50	F Fixed	C Clear	SB Square Baffle
	8W	2400K		277V	B Black	E Exterior-IP65	S Swivel	D Diffused	ASYM Asymmetric Baffle
		2700K				W Wet-IP68	3Arc 3" Arc Swivel	SI Satin Ice (Interior Use Only)	SKB Kicker Baffle
		3000K					6Arc 6" Arc Swivel	OW Opal White (Exterior Use Only)	
		3500K							
		4000K							
		5000K							


LENS OPTIONS:



Diffused*

- Interior or exterior use
- 87% transmission
- Lens is 1/8" (.09) thick, adds 1/16" to overall height.


*Additional charges apply.



Satin Ice White*

- Interior use only.
- Best for direct view use.
- 42% transmission
- Lens is 1/4" (.25) thick, adds 1/8" to overall height

*Additional charges apply.



Opal White

- Exterior use only.
- Best for direct view use.

LUMELINE

Direct View Linear LED Strip Fixture



TECHNICAL SPECIFICATIONS:

WATTAGE	4 or 8 watts per linear ft.
INPUT VOLTAGE	90-120V or 230-277V
CONTROL	Leading Edge/Trailing Edge line dimmer 0-10V, DMX*
LED SPACING	0.66" on center
LENGTH	6" increments, (12" min) allow 1/4" for each end cap and 2" for power feed cable
TOTAL HEIGHT	1.24" (not including clip) or 1.37" with satin ice lens
TOTAL WIDTH	1.68"
COLOR OPTIONS	2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K
MOUNTING	Fixed, Swivel, 3" Arc or 6" Arc
AVAILABLE OPTICS	120°
RATING	IP50, IP65, IP68
COLOR RENDERING INDEX (CRI)	90 + CRI
POWER CABLE	UL Standard 6 ft.
ENVIRONMENTAL	Operating temperature--40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Use Boca SDS module for 0-10V DALI or DMX Dimming.

** Military spec available under special request-lead times may be impacted.

LUMINAIRE INFORMATION:


IES Files Pending

· Specific Files Available On Request


DIMENSIONS:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.

Plan View

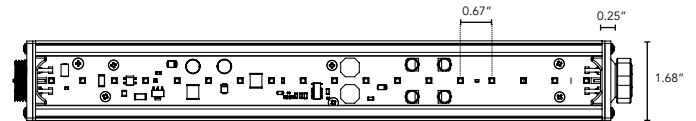


Elevation View

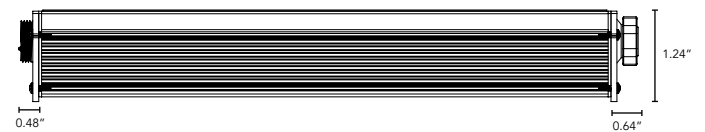


MOUNTING INFORMATION:


- For vertical installation please contact the factory for specific mounting instructions.




Fixed



Swivel



3" Arc

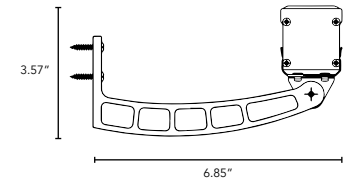

6" Arc