



MONO-DMXTX

Boca Wireless Family: Wireless Transmitter

Customer:

Date:

Type:


Project:



- The Boca Flasher MonoDMXTx provides a W-DMX Wireless Transmitter solution.
- RJ45 Data input (W2A).
- 24db Effective Radiated Power (Tx).
- Smart Link Protocol.
- Compatible with: NanoRFO, NanoRouter, NanoRouter-X, SDS-DMX, HPCCS, HPFB, SBLMIX.

DIMENSIONS:


Plan View

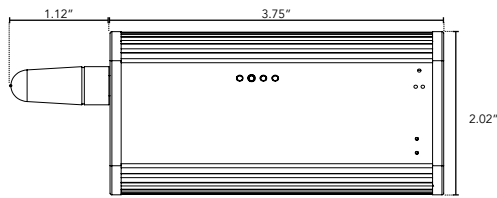

Elevation View



End Cap



PRODUCT SPECIFICATIONS:

	INPUT CABLE	VOLTAGE	FINISH	ANTENNA
MonoDMXTx	Mini USB	5V	Clear AL	DA Directional RA Remote SA Standard Low Profile

TECHNICAL SPECIFICATIONS:

INPUT VOLTAGE	USB, 5V
INPUT PORT	RJ45
OUTPUT PORTS	W-DMX
FREQUENCY	2.4GHZ
TOTAL WIDTH	2"
TOTAL HEIGHT	0.7"

MONO-DMXTX

Boca Wireless Family: Wireless Transmitter



MATRIX:

		CONTROLS											
		SDS10V	SDS-DMX	NDI-10V	NDT-10V	N-RFO	NanoRouter	NanoRouter-X	WA5	Monolink-W10V	MonoBoost	MonoDMXTX	PDMX-C
FIXTURES	NanoHD	●	●	●		●	●	●		●			
	NanoWarmDim	●	●	●		●	●	●		●			
	NanoLume	●	●	●		●	●	●		●			
	NanoX	●	●	●		●	●	●		●			
	HPNFC-HO	●	●										
	HPNLS-HO	●	●										
	HPNLS-LO	●	●										
	Lumeline	●	●										
	Niche-HV	●	●										
	SBL-MC	●	●										
	NanoMix						●	●					
	HPNLS-MIX						●	●					
	Tri-Light HV						●	●					
	NanoTune			●	●	●	●						
	HPCCS						●	●	●		●	●	●
	HPFB						●	●	●		●	●	●
	SBL-MIX						●	●	●		●	●	●
	N-RFO						●	●	●		●	●	●
	NanoRouter						●	●	●		●	●	●
	NanoRouter-X						●	●	●		●	●	●
	Monolink-W10V						●	●	●		●	●	●
	MonoBoost						●	●	●		●	●	●
	WA5												●
	SDS-DMX						●	●	●		●	●	●
	SDS-10V									●			