



NANOROUTER

Boca Nano Router Family

Customer:

Date:

Type:

Project:



- Used for Boca Flasher's color changing products.
- Anodized aluminum housing.
- Easy Installation wired or wireless DMX capable.
- Plenum rated*
- Signal boost from unit to unit.
- Contact Boca Flasher for use with OEM fixture needs.
- Contact Boca Flasher for tips with custom installations.




PRODUCT SPECIFICATIONS:


	INPUT CABLE	VOLTAGE	FINISH	MODE	WIRING
Nano Router	Line, Neutral, Ground	120V 277V UNV	B Black	TX / RX RX only (Field Configuration)	EP Edison Plug HW Hard Wired

DIMENSIONS:

Plan View



Elevation View

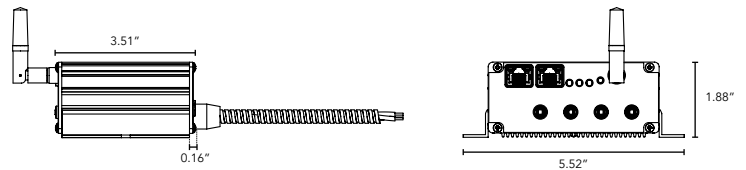

NANO ROUTER

Boca Nano Router Family



TECHNICAL SPECIFICATIONS:

INPUT VOLTAGE	120V
INPUT PORT	DMX (Hard Wire or Wireless)
OUTPUT PORTS	DMX - Signal, Proprietary Connections For Boca Flasher Products
FREQUENCY	60HZ
TOTAL WIDTH	5.5"
TOTAL HEIGHT	2.0"
MAX LOAD	5A per Port
HOUSING LENGTH	4.25" / 3.73"
LENGTH WITH MOUNTING	5.5" / 3.73"
DIMMING CONTROL	DMX
MOUNTING	Brackets w/ Screw Optional
POWER CABLE	UL Standard 6.5 ft.
RATING	ETL
ENVIRONMENTAL	Operating temperature--40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

** Military spec available under special request-lead times may be impacted.