



NANOTUNE

Tunable White Light Line Voltage Small Profile Linear LED Fixture

Customer:

Date:

Type:

Project:



- Three diode array for precise white tuning.
- 2 channel control via Boca NanoRouter (DMX based).
- Compact, variable light fixture for dry location use only.
- Fixture comes in 6" increments (12" minimum).
- Many options and accessories to suit a range of projects.
- Integrates with Boca Wireless DMX Router system for ease of installation and control.
- Operates with standard 512 DMX controller.
- White or black finish, check factory for availability.
- Total linear feet per power feed: 76 ft. @ 120V or 156 ft. @ 277V
- Contact Boca Flasher for tips with custom installations.




PRODUCT SPECIFICATIONS:


	WATTAGE	COLOR OPTION	OPTIC	VOLTAGE	FINISH	MOUNTING	LENS	BAFFLE <small>(Not Available with 10° Optics)</small>
Nanotune	6W	2000K 2400K 2700K 3000K 3500K 4000K 5000K Choose Low End or High End	15°x40° 10° 120°	90V-120V	W White B Black	F Fixed H Hinge	C Clear CLD Clear Light Diffused <small>(Not Available with Optics)</small> HD Heavy Diffused <small>(Not Available with Optics)</small>	SQ Square ASYM Asymmetric

DIMENSIONS:

Plan View

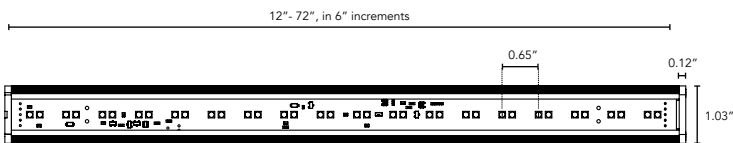

Elevation View



*Third Clip Required for 48" and Larger Fixtures

NANOTUNE

Tuneable White Light Line Voltage Small
Profile Linear LED Fixture




TECHNICAL SPECIFICATIONS:

WATTAGE	6 watts per linear ft.
INPUT VOLTAGE	90-120V
CONTROL	2-Channel DMX (NanoRouter)
POWER CABLE	UL Standard 6 ft.
LENGTH	12-72", in 6" increment
TOTAL WIDTH	1.04"
TOTAL HEIGHT	0.82" (not including clip)
COLOR OPTIONS	2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K
MOUNTING	Fixed, Hinge
AVAILABLE OPTICS	10°, 15°x40°, 120°
COLOR RENDERING INDEX (CRI)	90 + CRI
FINISH OPTICS	White or Black High temp ABS Plastic
TOTAL LINEAR FT. PER POWER FEED	76ft. @ 120V 156ft. @ 227V
ENVIRONMENTAL	Operating temperature--40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.

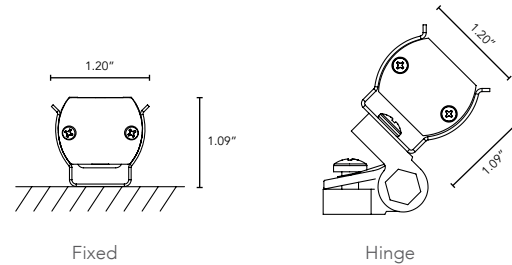

** Military spec available under special request-lead times may be impacted.