



# NANOWEDGE

Micro Profile LED Closet & Corner Light

Customer:

Date:

Type:

Project:



- Compact, variable light fixture for interior use.
- Fixture comes in 6" increments (12" minimum)
- Many options in color temperature to suit a range of projects. Call factory for additional options.
- Fixtures offer optional Occupancy or IR Sensor on/off operation\*\*.
- Can use standard line voltage dimming without sensors.
- 90° angular design for ease of integration in confined spaces.
- Interior installation use only.
- Contact Boca Flasher for tips with custom installations.




## PRODUCT SPECIFICATIONS:

	WATTAGE	COLOR OPTION	OPTIC	VOLTAGE	FINISH	LENS	SENSOR
NanoWedge	CL		120°	120V	A		
	4W	2400K			A Clear Anodized Aluminum	C Clear	O Occupancy
	8W	2700K				D Diffused	IR Infra Red
		3000K				OW Opal White	NS No Sensor
		3500K					
		4000K					
		5000K					

## DIMENSIONS:


Plan View

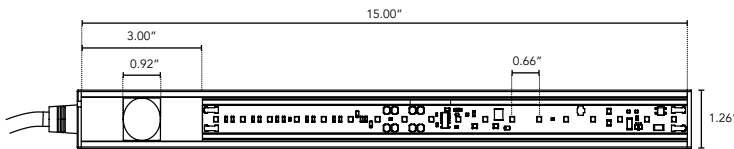

Elevation View



End Cap

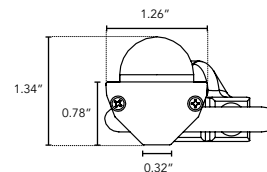

Boca Flasher, Inc. 508 South Military Trail, Deerfield Beach, Florida 33442 USA Phone: 561.989.5338 Fax: 561.982.8323 © 2018 Boca Flasher, Inc

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Flasher sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. NanoWedge meets or exceeds Title 24 Compliance. >45 Lumens per Watt. For additional information and details visit our website at [www.bocaflasher.com](http://www.bocaflasher.com). All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners.

REV 04262021

# NANOWEDGE

Micro Profile LED Closet & Corner Light



## TECHNICAL SPECIFICATIONS:

WATTAGE	4 or 8 watts per linear ft.
INPUT VOLTAGE	120VAC
CONTROL	Leading Edge/Trailing Edge line dimmer 0-10V*, 0cc Sensor**, IR Sensor**
LED SPACING	5/8" on center
LENGTH	12"-72" in 6" increments, allow 1/8" for each end cap and 1.5" for power feed cable
TOTAL HEIGHT	0.73" (not including clip)
TOTAL WIDTH	1.43"
COLOR OPTIONS	2400K, 2700K, 3000K, 3500K, 4000K, 5000K
MOUNTING	Fixed
AVAILABLE OPTICS	120°
RATING	IP50 Interior Only
COLOR RENDERING INDEX (CRI)	90 + CRI
POWER CABLE	UL Standard 6.5 ft.
ENVIRONMENTAL	Operating temperature -40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity


\*\*Requires Boca SDS Dimming Interface

\*\*Sensor Use Allows On/Off Only

\* Military spec available under special request-lead times may be impacted.

## MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.

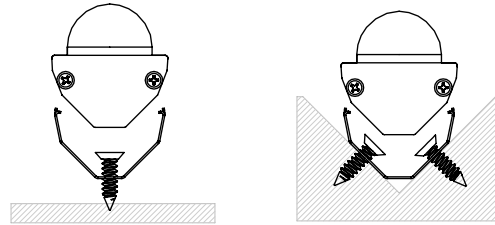

## LUMINAIRE INFORMATION:

IES Files Pending

- Specific Files Available On Request