



- Compact, variable light fixture.
- Fixture comes in 1ft, 1.5f, 2ft, and 4 feet to allow 6" incremental builds.
- Many options in color temperature to suit a range of projects, call factory for additional options
- Uses standard line voltage dimming.
- Patented CleanDim technology ensures even dimming from 0% - 100%.
- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V, DALI or DMX Dimming.
- The housing is an anodized aluminum with tempered.
- Glass lens for enhanced durability in demanding installations.
- Total linear feet per power feed (6W); 76 ft. @ 120V or 156ft. @ 277V
- NanoX is Exterior IP67 rated.
- Contact Boca Flasher for tips with custom installation procedures.



PRODUCT SPECIFICATIONS:

	WATTAGE	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	RATINGS	LENS
Nano-X	3W	2000K	120V	15°x45°	A Clear Anodized Aluminum	F Fixed H Hinge	I Interior-IP50 E Exterior-IP65	C Clear LD Light Diffused
	6W	2400K 2700K 3000K 3500K 4000K 5000K 6500K	277V	120°				

DIMENSIONS:

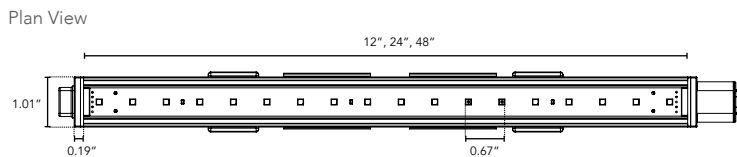

NANO-X

Micro Profile Exterior LED Task and Cove Fixture



TECHNICAL SPECIFICATIONS:


WATTAGE	3 or 6 watts per linear ft.
INPUT VOLTAGE	90-120V 230-227V
CONTROL	Leading Edge/Trailing Edge line dimmer 0-10V, DALI, or DMX*
POWER CABLE	UL Standard 10 ft.
PIXEL SPACING	5/8" on center
LENGTH	1 ft., 1.5', 2ft., and 4 ft, allow 1/4" for each end cap and 1.25" for power feed cable
TOTAL WIDTH	1.21" Fixed Clip
TOTAL HEIGHT	1.89" Fixed Clip
INPUT CURRENT	54mA @ 120V 24mA @ 277V
COLOR OPTIONS	2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
MOUNTING	Fixed Clip, Hinge
AVAILABLE OPTICS	120°, 15° x 45°
RATING	IP50 Dry, IP67 Exterior
COLOR RENDERING INDEX (CRI)	90 + CRI
ENVIRONMENTAL	Operating temperature--40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

*Uses Boca SDS Module for 0-10V, Dali, or DMX Dimming.


** Military spec available under special request-lead times may be impacted.

MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.

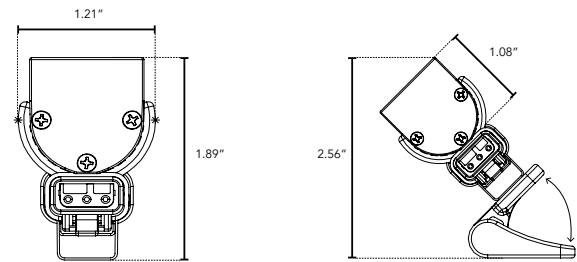

LUMINAIRE INFORMATION:



Fixture Type: 3500°K, 120° optic, 120V, 12"
Total lumen Output: 2290 Lumens per 4ft.
Luminaire Efficacy: 93 Lumens per watt

Characteristics:

LUMENS PER LAMP	572.6 (1 lamp)
TOTAL LAMP LUMENS	572.6
LUMINAIRE LUMENS	573
TOTAL LUMINAIRE EFFICIENCY	100%
LUMEN EFFICACY RATING	93
TOTAL LUMINAIRE WATTS	6.15
BALLAST FACTOR	1.00
CIE TYPE	Direct
SPACING CRITERION (0-180)	1.28
SPACING CRITERION (90-270)	1.30
SPACING CRITERION (Diagonal)	1.40
BASIC LUMINOUS SHAPE	Rectangular
LUMINOUS LENGTH (0-180)	0.31m
LUMINOUS WIDTH (90-270)	0.01m
LUMINOUS HEIGHT	0.00m