



SMART DIMMER DALI


Boca Dimmer Family: DALI

Customer:

Date:

Type:

Project:

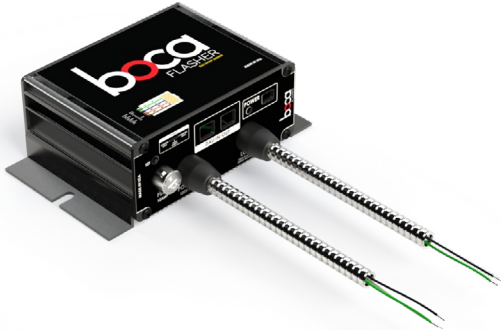

The Boca Flasher SMART Dimmer DALI provides an interface with a dimming protocol of standard DALI show control. Our patent pending technology changes the paradigm of lighting control. With the ease of a switch, the DALI Dimmer enables the luminaires and controls to evenly dim with precise configurations with no flickering. It's perfect for Boca Flasher LED systems such as the BOCA HPNLS, HPNFC, NANOLUME and many other Boca Flasher LED lighting products.

- Used for Boca Flasher's HPNLS, HPNFC, NANOLUME and other LED lighting products.
- Anodized aluminum housing.
- Easy Installation.
- Contact Boca Flasher for use with OEM fixture needs.
- Contact Boca Flasher for tips with custom installations.





PRODUCT SPECIFICATIONS:

	INPUT/OUTPUT PORT	FINISH	VOLTAGE	MODE	WIRING	FREQUENCY
Smart Dimmer	DALI	BLACK	120V - 277V	DALI		
					EP Edison Plug	50 HZ
					HW Hard Wired	60 HZ

DIMENSIONS:

Elevation View

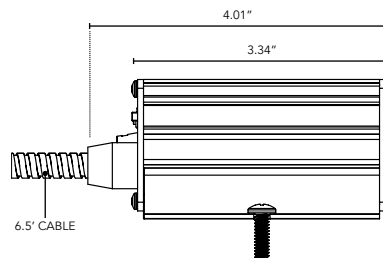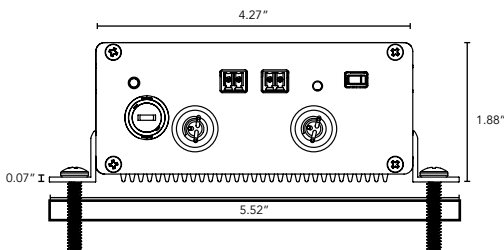

SMART DIMMER DALI


Boca Dimmer Family: DALI



TECHNICAL SPECIFICATIONS:

INPUT VOLTAGE	120V-277VAC
INPUT PORT	Terminal
OUTPUT PORT	Terminal
FREQUENCY	50 HZ or 60HZ
TOTAL WIDTH	5.5"
TOTAL HEIGHT	2.0"
MAX LOAD	750-1300W (Voltage Dependent)
HOUSING LENGTH	4.25"
LENGTH WITH MOUNTING	5.5"
DIMMING CONTROL	DALI
MOUNTING	Brackets w/ Screw Optional
POWER CABLE	UL Standard 6.5 ft.
RATING	DALI
MODE	IP60 (Interior Only)
ENVIRONMENTAL	Operating temperature--40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

MOUNTING INFORMATION:

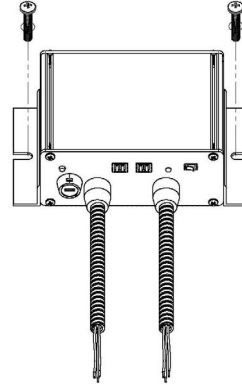

* Military spec available under special request-lead times may be impacted.