

- Triple diode ensures even color washing even at short distances.
- Compact, variable light fixture for dry, damp or wet location use.
- Fixture comes in 6" increments (12" minimum).
- Many options in accessories to suit a range of projects.
- UL Listed for dry or damp or wet location (model dependent).
- Anodized aluminum housing with a durable finish ensuring it is weather and abrasion resistant.
- Clear anodized aluminum or black finish. Check factory for availability.
- Four different types of lenses.
- Can use standard 512 DMX show controls. Need ICMS box for proper distribution. To be used with ICMS BOX 2M
- Total linear feet per power feed: 8ft - Class 2 limited.




PRODUCT SPECIFICATIONS:

	COLOR OPTION	OPTIC	PRIMARY VOLTAGE	FINISH	LOCATION	MOUNTING	LENS	OPTION
Tri-Light		120°		A				
	1 Triple Diode RGB 2 RGB with White		120V 277V <small>(Light is 24VAC)</small>	A Clear Anodized Aluminum	I Interior E Exterior W Wet	F Fixed S Swivel A Arc	C Clear D Diffused SI Satin Ice <small>(Interior Use Only)</small> OW Opal White <small>(Exterior Use Only)</small>	

DIMENSIONS:

Plan View

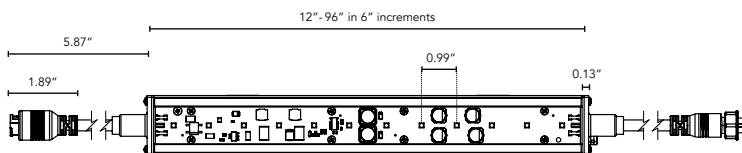

Elevation View



TRI-LIGHT

Triple Diode DMX Controlled Linear LED Fixture



TECHNICAL SPECIFICATIONS:

WATTAGE	8 watts per linear ft for RGB 10 watts per linear ft for RGBW
INPUT VOLTAGE	24 VAC
CONTROL	IMCS box w/ standard DMX512 control
LED SPACING	0.44" on center
LENGTH	12"-96"
TOTAL WIDTH	1.68"
TOTAL HEIGHT	1.75" (not including clip)
MOUNTING	Fixed, Swivel, or Arc
AVAILABLE OPTICS	120°
FINISH OPTIONS	White or Black Anodized Aluminum
COLOR OPTIONS	Triple diode RGB, or triple diode RGB w/ white option
COLOR RENDERING INDEX (CRI)	90 + CRI
RATING	IP60, IP65, IP68
POWER CABLE	30 ft home run cable

MOUNTING INFORMATION:

For vertical installation please contact the factory for specific mounting instructions.

