

NANOTUNE

Tuneable White Light Line Voltage Small Profile Linear LED Fixture





Type:

Project:


- · Three diode array for precise white tuning.
- · 2 channel control via Boca NanoRouter (DMX based).
- · Compact, variable light fixture for dry location use only.
- · Fixture comes in 6" increments (12" minimum).
- $\cdot\,$ Many options and accessories to suit a range of projects.
- $\cdot\,$ Integrates with Boca Wireless DMX Router system for ease of installation and control.
- · Operates with standard 512 DMX controller.
- \cdot White or black finish, check factory for availability.
- · Total linear feet per power feed: 76 ft. @ 120V or 156 ft. @ 277V
- · Contact Boca Flasher for tips with custom installations.
- · Knife Edge Cove compatible.



PRODUCT SPECIFICATIONS:

Nanotune	WATTAGE	COLOF	ROPTION	OPTIC	VOLTAGE 90V-120V	FINISH	MOUNTING	LENS	BAFFLE (Not Available with 10° Optics)
		2000K 2400K 2700K 3000K 3500K	4000K 5000K Choose Low End or High End	15°x40° 10° 120°		W White B Black	F Fixed H Hinge	C Clear CLD Clear Light Diffused (Not Available with Optics) HD Heavy Diffused (Not Available with Optics)	SQ Square ASYM Asymmetric
ACCESSORY T Track Mount (Only available with Fixed Mounting)	KNIFE EDGE COVE Y YES N NO								

DIMENSIONS:

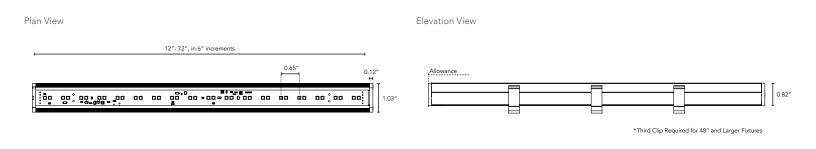

Boca Flasher, Inc. 508 South Military Trail, Deerfield Beach, Florida 33442 USA Phone: 561.989.5338 Fax: 561.982.8323 © 2018 Boca Flasher, Inc

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Flasher sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. NANOTUNE meets or exceeds Title 24 Compliance. >45 Lumens per Watt. For additional information and details visit our website at www.bocaflasher.com. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners.

NANOTUNE

Tuneable White Light Line Voltage Small Profile Linear LED Fixture




TECHNICAL SPECIFICATIONS:

WATTAGE		6 watts per linear ft.			
INPUT VOLTAGE		90-120V			
CONTROL		2-Channel DMX (NanoRouter), 2-Channel 0-10V			
POWER CABLE		UL Standard 10 ft.			
LENGTH		12-72", in 6" increment			
TOTAL WIDTH		1.04″			
TOTAL HEIGHT		0.82" (not including clip)			
COLOR OPTIONS		2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K			
MOUNTING		Fixed, Hinge			
AVAILABLE OPTICS	5	10°, 15°×40°, 120°			
COLOR RENDERIN	G INDEX (CRI)	90 + CRI			
FINISH		White or Black High temperature ABS Plastic			
TOTAL LINEAR FT. POWER FEED	PER	76ft. @ 120V 156ft. @ 227V			
ENVIRONMENTAL	Storage temperatu	ature40°F-140°F Ambient(-40°C-60°C)** ire -40°F-140°F Ambient indoor fixtures o =<50% relative humidity			

** Military spec available under special request-lead times may be impacted.


MOUNTING INFORMATION:

• For vertical installation please contact the factory for specific mounting instructions.



ACCESSORY:

Track Mount Clip System is only available with Fixed Mounting.

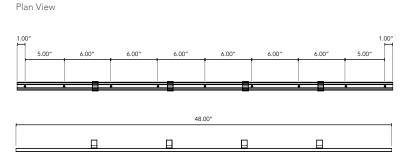






KNIFE EDGE COVE:

KEC Profile

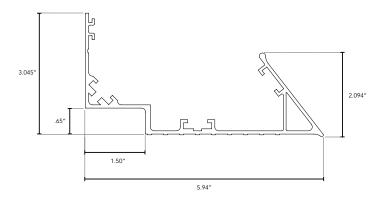

Boca Flasher, Inc. 508 South Military Trail, Deerfield Beach, Florida 33442 USA Phone: 561.989.5338 Fax: 561.982.8323 © 2018 Boca Flasher, Inc

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Flasher sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. NANOTUNE meets or exceeds Title 24 Compliance. >45 Lumens per Watt. For additional information and details visit our website at www.bocaflasher.com. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners.