

Customer:	Date:	Type:
Project:		

The Boca Flasher SMART Dimmer DALI provides an interface with a dimming protocol of standard DALI show control. Our patent pending technology changes the paradigm of lighting control. With the ease of a switch, the DALI Dimmer enables the luminaires and controls to evenly dim with precise configurations with no flickering. It's perfect for Boca Flasher LED systems such as the BOCA HPNLS, HPNFC, NANOLUME and many other Boca Flasher LED lighting products.

- $\cdot\,$  Used for Boca Flasher's HPNLS, HPNFC, NANOLUME and other LED lighting products.
- · Anodized aluminum housing.
- · Easy Installation.

- · Contact Boca Flasher for use with OEM fixture needs.
- · Contact Boca Flasher for tips with custom installations.


### **PRODUCT SPECIFICATIONS:**

IP50

	INPUT/OUTPUT PORT	FINISH	VOLTAGE	MODE	WIRING	FREQUENCY
Smart Dimmer	DALI	BLACK	120V - 277V	DALI		
					<b>EP</b> Edison Plug <b>HW</b> Hard Wired	50 HZ 60 HZ

### **DIMENSIONS:**

Elevation View

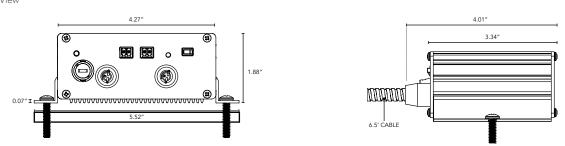

#### Boca Flasher, Inc. 508 South Military Trail, Deerfield Beach, Florida 33442 USA Phone: 561.989.5338 Fax: 561.982.8323 © 2017 Boca Flasher, Inc.

We are constantly improving our products and reserve the right to change options and specifications. For specific requirements, contact your Boca Flasher sales representative. For additional information and details visit our website at www.bocaflasher.com. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners.

# **SMART DIMMER DALI**

Boca Dimmer Family: DALI




## **TECHNICAL SPECIFICATIONS:**

INPUT VOLTAGE		120V-277VAC	
INPUT PORT		Terminal	
OUTPUT PORT		Terminal	
FREQUENCY		50 HZ or 60HZ	
TOTAL WIDTH		5.5″	
TOTAL HEIGHT		2.0″	
MAX LOAD		750-1300W (Voltage Dependent)	
HOUSING LENGTH		4.25"	
LENGTH WITH MOUNTING		5.5″	
DIMMING CONTROL		DALI	
MOUNTING		Brackets w/ Screw Optional	
POWER CABLE		UL Standard 6.5 ft.	
RATING		DALI	
MODE		IP60 (Interior Only)	
ENVIRONMENTAL	Operating temperature40°F-140°F Ambient(-40°C-60°C)** Storage temperature -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity		

\* Military spec available under special request-lead times may be impacted.

# **MOUNTING INFORMATION:**



We are constantly improving our products and reserve the right to change options and specifications. For specific requirements, contact your Boca Flasher sales representative. For additional information and details visit our website at www.bocaflasher.com. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners.