

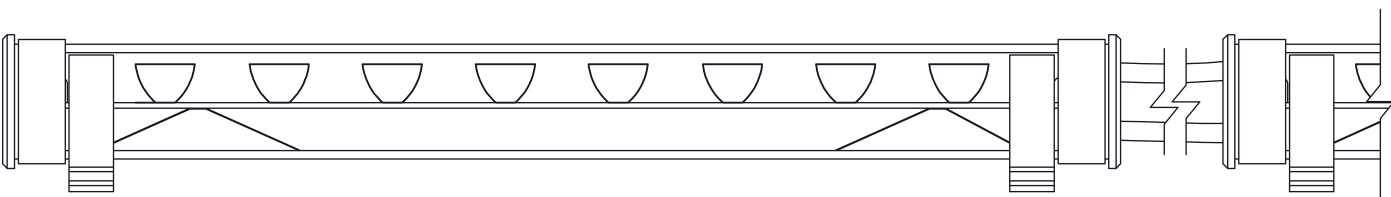



**1 PLAN VIEW**  
SCALE: 6" = 1'-0"



**2 ELEVATION VIEW**  
SCALE: 6" = 1'-0"

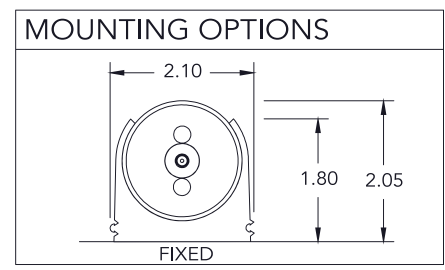

TECHNICAL DATA	
Parameter	Data
Power	8W per linear foot
Input Voltage	12VAC
Input Current per Linear Ft	410mA RMS per linear foot
Control	Standard Magnetic Low Voltage Dimming
Power Cable Length	UL Standard 6ft
LED Spacing	1.5" on center
Fixture Length	15"-99", in 6" increments
Fixture Width	2.05"
Total Height (not including clips)	1.50"
Mounting	Fixed Cllip
Available Optics	10°, 30°, 60°, 10°x60°, 30°x60°, 120°
Finish Options	Underwater Polycarbonate Tube
LED Color Options	2700K, 3000, 3500K, 4000, 5000K, amber, r, g, b
Color Rendering Index	+90
Ratings	IP68
Total Linear ft per 20A breaker	160 feet
Total Linear ft per 15A breaker	120 feet
Total Linear ft per Power Feed Transformer	10 feet
	Primary 120V or 277V, Secondary 12V

 LED Lighting Systems, Technologies, & Manufacturing	PRODUCT NAME: <b>HPSUB</b>	
	FILE NAME: TECHNICAL SHEET	PART #: HP-SUB
	DRAWN BY: STEPHANIE BURKE	DATE: 03272020
	DESIGN BY: DAVE URBAN	
	APPROVED BY: STEPHANIE BURKE	
508 South Military Trail Deerfield Beach FL, 33442	www.BocaFlasher.com (561) 989-5338	
THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.		
SCALE: NTS	SHEET: 1 OF 1	REV: A