




1 PLAN VIEW




3 END CAP

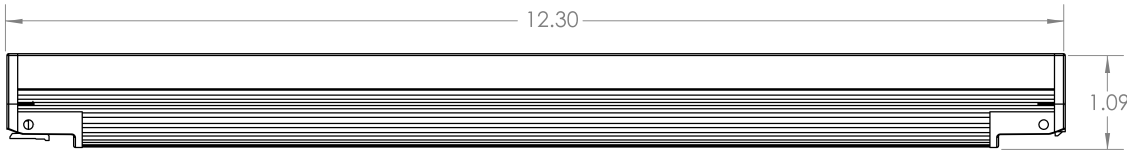


2 ELEVATION VIEW

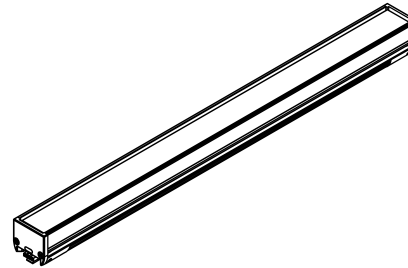

### ENDCAP CONDITIONS





MALE (M)





FEMALE (F)

### MOUNTING OPTIONS

#### CLIP10A & 17A



#### FXT154A



| TECHNICAL DATA                     |  |  |
|------------------------------------|--|--|
| Parameter                          | Data                                   |  |
| Power                              | 10W                                    | 6W                                     |
| Input Voltage                      | 120V or 277V                           | 120V or 277V                           |
| Input Current per Linear Ft        | 87mA @120V 40mA @ 277V                 | 53mA @120V 26mA @ 277V                 |
| Control                            | Line Voltage Dimmer                    | Line Voltage Dimmer                    |
| Power Cable Length                 | UL Standard 6.5ft                      | UL Standard 6.5ft                      |
| LED Spacing                        | 0.67"                                  | 0.67"                                  |
| Fixture Length                     | 12"-72", in 4" increments              | 12"-72", in 4" increments              |
| Fixture Width                      | 1.01"                                  | 1.01"                                  |
| Total Height (not including clips) | 1.09"                                  | 1.09"                                  |
| Mounting                           | Clip 10A, Clip17A, FXT154A             | Clip 10A, Clip17A, FXT154A             |
| Available Optics                   | 15x40°, 120°                           | 15x40°, 120°                           |
| Finish Options                     | Clear Anodized                         | Clear Anodized                         |
| LED Color Options                  | 2000K, 2400K, 2700K,3000K, 3500K,4000K | 2000K, 2400K, 2700K,3000K, 3500K,4000K |
| Color Rendering Index              | 95+                                    | 95+                                    |
| Ratings                            | IP52                                   | IP52                                   |
| Total Linear ft per 20A breaker    | 180ft @ 120V, 420ft @ 277V             | 300ft @ 120V, 660ft @ 277V             |
| Total Linear ft per 15A breaker    | 136ft @ 120V, 315ft @ 277V             | 220ft @ 120V, 490ft @ 277V             |
| Total Linear ft per Power Feed     | 46ft @ 120V, 100ft @ 277V              | 75ft @ 120V, 166ft @ 277V              |
| Transformer                        | N/A                                    | N/A                                    |



LED Lighting Systems, Technologies, & Manufacturing

508 South Military Trail  
Deerfield Beach FL, 33442

www.BocaFlasher.com  
(561) 989-5338

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.

PRODUCT NAME:  
**NANOLUME HD**

FILE NAME: TECHNICAL SHEET

PART #: NANOLUME HO\_UC

DRAWN BY: HYERI KANG

DATE: 05142020

DESIGN BY: LUIS ROSADO

APPROVED BY: M. PINDER

SCALE: NTS

SHEET: 1 OF 1

REV: A