



**1 PLAN VIEW**  
SCALE: 6"=1'-0"

**2 ELEVATION VIEW**  
SCALE: 6"=1'-0"




**3 END CAP**  
SCALE: 6"=1'-0"

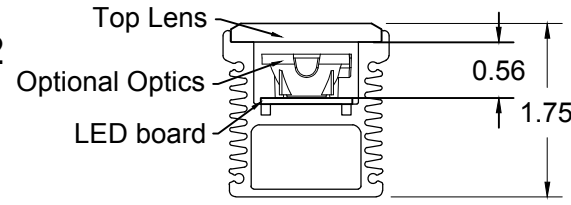


**4 SECTION**  
SCALE: 6"=1'-0"


**MOUNTING OPTIONS**




**FIXED**



**3" ARC**




**SWIVEL**

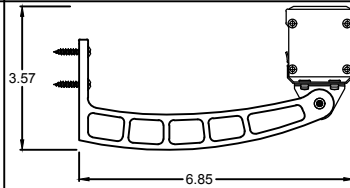


**6" ARC**


**END CAP CONDITIONS**




**POWER FEED (PF)**




**CLOSED END (CE)**




**FEMALE (F)**



**MALE (M)**



**TWIST LOCK FEMALE (TL)**



**TWIST LOCK MALE (TL)**

**TECHNICAL DATA**

Parameter	Data
Power	16 watts per linear ft
Input Voltage	90-120V or 230-277V
Input Current per Linear Ft	136mA@120V or 60mA@277V RMS per linear foot
Control	Leading-edge Trailing-edge Line Dimmer
Power Cable Length	UL Standard 6ft
LED Spacing, per strip	1" on center
Fixture Length	12"-96", in 6" increments
Fixture Width	1.68"
Total Height (not including clip)	1.75"
Mounting	Fixed, Swivel, 3" Arc Bracket & 6" Arc Bracket
Available Optics	10°, 30°, 60°, 10°x60°, 30°x60°, 120°
Finish Options	Clear or Black Anodized Aluminum
LED Color Options	27K,3K,35K,4K,5K,Amber,Red,Green,Blue
Color Rendering Index	90+ CRI
Ratings	Dry, IP65, IP68
Total linear ft per 20A breaker	80ft@120V or 180ft@277v
Total linear ft per 15A breaker:	60ft@120V or 135ft@277v
Total linear ft per power feed	36ft@120V or 80ft@277v
Transformer	N/A



LED Lighting Systems, Technologies, & Manufacturing

508 South Military Trail Deerfield Beach FL, 33442  
www.BocaFlasher.com (561) 989-5338

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.

REV 04082019

**HPNLS - HO**

FILE NAME:	TECHNICAL SHEET	PART #:	HPNLS-HO
DRAWN BY:	STEPHANIE BURKE		04 / 18 / 13
DESIGN BY:	LUIS ROSADO		
APPROVED BY:	ANGELA TODD		
SCALE:	NTS	SHEET:	1 OF 1