

- Compact, variable light fixture.
- Fixture comes in 1ft, 2ft, and 4 feet.
- Many options in color temperature to suit a range of projects, call factory for additional options
- Uses standard line voltage dimming.
- Patented CleanDim technology ensures even dimming from 0% - 100%.
- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V, DALI or DMX Dimming.
- Interior damp and exterior use variations.
- Total linear feet per power feed (6W); 76 ft. @ 120V or 156ft. @ 277V
- NanoX is Exterior IP65 rated.
- Contact Boca Flasher for tips with custom installation procedures.




PRODUCT SPECIFICATIONS:


	WATTAGE	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	RATINGS	LENS
Nano-X	3W	2000K	120V	15°x45°	A Clear Anodized Aluminum	F Fixed	I Interior E Exterior	C Clear LD Light Diffused
	6W	2400K 2700K 3000K 3500K 4000K 5000K 6500K	227V	120°				

DIMENSIONS:


Plan View

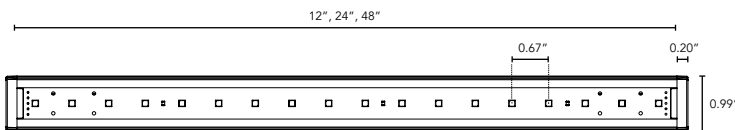

Elevation View



End View



NANO-X

Micro Profile Exterior LED Task and Cove Fixture




TECHNICAL SPECIFICATIONS:

WATTAGE	3 or 6 watts per linear ft.
INPUT VOLTAGE	90-120V 230-227V
CONTROL	Leading Edge/Trailing Edge line dimmer 0-10V, DALI, or DMX*
POWER CABLE	UL Standard 6 ft.
PIXEL SPACING	5/8" on center
LENGTH	1 ft., 2ft., and 4 ft, allow 1/4" for each end cap and 1.25" for power feed cable
TOTAL WIDTH	1.00"
TOTAL DIAMETER	0.83"
INPUT CURRENT	54mA @ 120V 24mA @ 227V
COLOR OPTIONS	2000K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
MOUNTING	Fixed Clip
AVAILABLE OPTICS	120°, 15° x 45°
RATING	Dry, Exterior
COLOR RENDERING INDEX (CRI)	90 + CRI

*Uses Boca SDS Module for 0-10V, Dali, or DMX Dimming.

MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.



LUMINAIRE INFORMATION:

- IES Files Pending
- Specific Files Available On Request