

- Triple diode ensures even color washing even at short distances.
- Compact, variable light fixture for dry, damp or wet location use.
- Fixture comes in 6" increments (12" minimum).
- Many options in accessories and optics to suit a range of projects.
- UL Listed for dry or damp or wet location (model dependent).
- Anodized aluminum housing with a durable finish ensuring it is weather and abrasion resistant.
- Clear anodized aluminum or black finish. Check factory for availability.
- Three different types of lenses.
- Can use standard 512 DMX controls.
- Total 48 feet per power feed.




**PRODUCT SPECIFICATIONS:**

	COLOR OPTION	OPTIC	VOLTAGE	LOCATION	MOUNTING	LENS	FINISH
Tri-Light-HV		120°	120VAC				
	<b>1</b> Triple Diode RGB <b>2</b> RGB with White			<b>I</b> Interior <b>E</b> Exterior <b>W</b> Wet	<b>F</b> Fixed <b>S</b> Swivel <b>A</b> Arc	<b>C</b> Clear <b>D</b> Diffused <b>SI</b> Satin Ice (Interior Use Only) <b>OW</b> Opal White (Exterior Use Only)	<b>A</b> Clear Anodized Aluminum <b>B</b> Black

**DIMENSIONS:**

Plan View

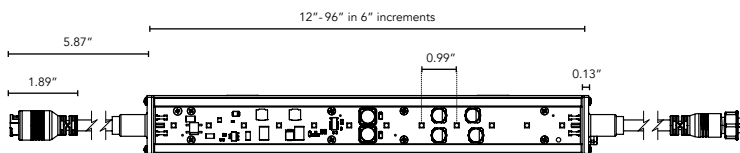

Elevation View



# TRI-LIGHT HV

Triple Diode DMX Controlled Linear LED Fixture



## TECHNICAL SPECIFICATIONS:

WATTAGE	12W Max, Software Controlled
INPUT VOLTAGE	120VAC
CONTROL	NANOROUTER w/ standard DMX512 control
LED SPACING	1.00"
LENGTH	12"-96", 6" Increment
TOTAL WIDTH	1.68"
TOTAL HEIGHT	1.80" (not including clip)
MOUNTING	Fixed, Swivel, or Arc
AVAILABLE OPTICS	120°
FINISH OPTICS	White or Black High Temp. ABS Plastic
COLOR OPTIONS	Triple diode RGB, or triple diode RGB w/ white option
INPUT CURRENT	120VAC
RATING	IP60, IP65, IP68
POWER CABLE	25 ft home run cable

## MOUNTING INFORMATION:

For vertical installation please contact the factory for specific mounting instructions.

