



**1 PLAN VIEW MASTER**  
SCALE: 4"=1'-0"



**2 PLAN VIEW SATELLITE**  
SCALE: 4"=1'-0"

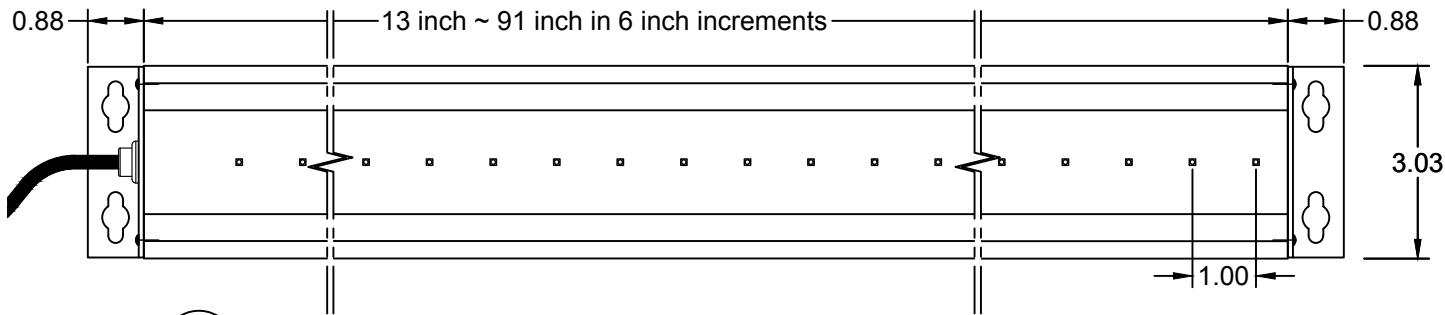


**3 ELEVATION VIEW**  
SCALE: 4"=1'-0"



Magnetic plates attach to the back.  
\*Option not available with hardwire install.

**4 END CAP**  
SCALE: 6"=1'-0"


ELECTRICAL COMPONENTS



**5 SECTION**  
SCALE: 6"=1'-0"

**TECHNICAL DATA**

Parameter	Data
Power(W)	Boost:15/ Hi:9 / Mid:5 / Lo:3
Input Voltage	90-120V
Input Current per Linear Ft(A)	Boost:0.3 / Hi:0.2 / Mid:0.16 / Lo:0.15
Control	Touch Pad
Power Cable Length	UL Standard 6ft
LED Spacing	1/3in
Fixture Length	13"-88" in 6" increments (L-Shaped Brackets+1.76')
Fixture Width	3.03"
Total Height	0.85"
Mounting	Magnetic or L-Shaped Bracket
Available Optics	120°
Finish Options	White
LED Color Options	27K, 3K, 35K, 4K, 5K
Color Rendering Index	90+ CRI
Ratings	Dry
Total Linear ft per 20A braker	53ft (does not include controller length)
Total Linear ft per 15A braker	40ft (does not include controller length)
Total Linear ft per Power feed	13ft
Transformer	N/A

 LED Lighting Systems, Technologies, & Manufacturing 508 South Military Trail Deerfield Beach FL, 33442 www.BocaFlasher.com (561) 989-5338	REV 04082019		<b>TASK LIGHT(MASTER)</b>	
	FILE NAME:	TECHNICAL SHEET	PART #:	TASK LIGHT
DRAWN BY:	CEDRIC LOUIS	12 - 18 - 13		
DESIGN BY:				
APPROVED BY:	STEPHANIE BURKE			
SCALE:				SHEET:

THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.