

NANO WARM DIM

| | | | |
|-------|-------|----------|-----------|
| DATE: | TYPE: | PROJECT: | CUSTOMER: |
| | | | |

Micro Profile LED Task and Cove Fixture with Warm Dim

Newest Addition to the NANOLUME Family of Products

The popular NANOLUME can now be specified with Boca Flasher's Dim to Warm technology (NANO WARM DIM). Standard range shifts the color temperature from 3000K to 2000K as the fixture is dimmed. Other color range options are available to meet any project need. Boca's patented CleanDim® technology ensures even dimming from 0-100%.




KEY FEATURES:

- Compact, variable light fixture.
- Fixture comes in 6" increments with a 12" minimum.
- Designer selectable color ranges to suit a variety of projects, call factory for additional options.
- Uses standard line voltage dimming.


- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V or DMX Dimming.
- Interior installations only.
- Contact Boca Flasher for tips with custom installation procedures.
- Total linear feet per power feed; 76 ft. @ 120V or 156ft. @ 277V

DIAGRAMS & DIMENSIONS:


PLAN VIEW



ELEVATION VIEW



MOUNTING INFORMATION:

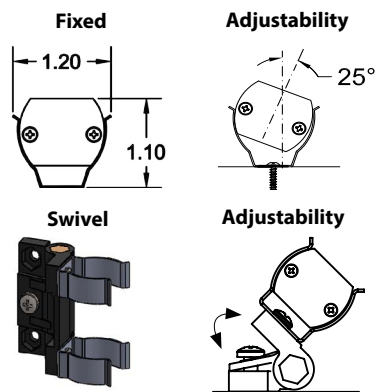

*Note: Attempting to aim more than 25° may cause fixtures to fall out of brackets.

*Note: Wide range of angle adjustable.

* For vertical installation please contact the factory for specific mounting Instructions.
 * For installations above 4' please contact the factory.

TECHNICAL SPECIFICATIONS:

| | |
|--|---|
| WATTAGE: 6 watts per linear ft. | MOUNTING: Fixed Clip |
| INPUT VOLTAGE: 90-120V 230-277V | AVAILABLE OPTICS: 15x40°, 120° |
| CONTROL: Leading-edge/Trailing-edge line dimmer | FINISH OPTICS: White or Black High Temp. ABS Plastic |
| LED SPACING: 0.65" on center | COLOR OPTIONS: 2000K - 3000K |
| LENGTH: 12-72", in 6" increment | TOTAL LINEAR FT. PER POWER FEED: 76ft. @ 120V, 156ft. @ 277V |
| TOTAL WIDTH: 1.03" | RATING: Dry |
| TOTAL HEIGHT: 0.82" (not including clip) | COLOR RENDERING INDEX (CRI): 90 + CRI |
| INPUT CURRENT: 54mA @ 120V 24mA @ 277V | |

PROJECT SPECIFICATIONS:

