

DATE: \_\_\_\_\_ TYPE: \_\_\_\_\_ PROJECT: \_\_\_\_\_ CUSTOMER: \_\_\_\_\_






## Tunable White Light Line Voltage Small Profile Linear LED Fixture

Tunable, dimmable white light fixture for those spaces where color temperature adjustment is essential. The Boca NANOTUNE is the latest addition to the Boca NANOLUME family of products. The Two channel DMX fixture allows full-range control of desired CCT while delivering industry best quality white light in a compact housing. NANOTUNE utilizes Boca Flasher's wireless mesh network router array to ease any installation.

### KEY FEATURES:

- Three diode array for precise white tuning.
- 2 channel control via Boca NanoRouter(DMX based).
- Compact, variable light fixture for dry location use only.
- Fixture comes in 6" increments (12" minimum).
- Many options and accessories to suit a range of projects.
- Integrates with Boca Wireless Router for ease of installation and control.
- Operates with standard 512 DMX controls.
- White or black finish, check factory for availability.
- Contact Boca Flasher for tips with custom installations.
- Total linear feet per power feed: 76 ft. @ 120V or 156 ft. @ 277V

### DIAGRAMS AND DIMENSIONS:

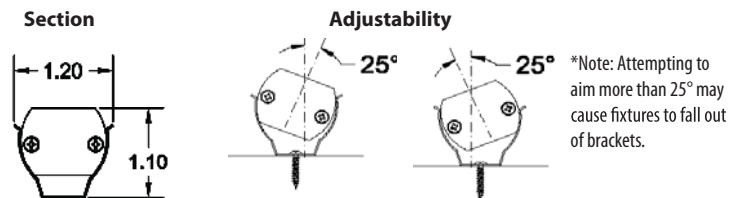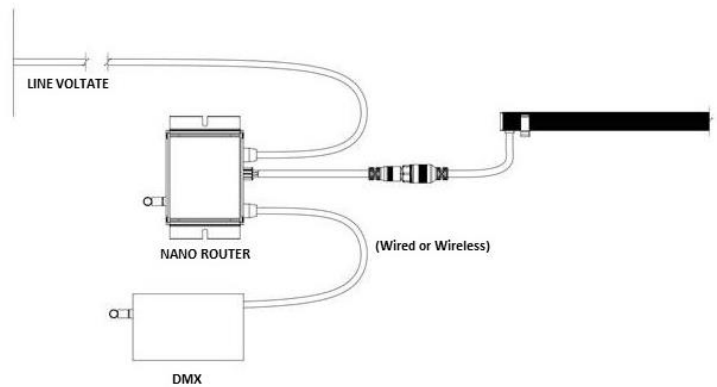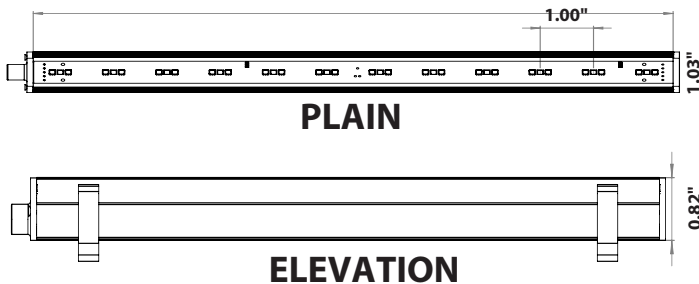

\* For vertical installations please contact the factory for specific mounting instructions.  
\* For installations above 4' please contact the factory.

### TECHNICAL SPECIFICATIONS:

WATTAGE:	6W per linear ft.	MOUNTING:	Swivel
INPUT VOLTAGE:	90-120V	AVAILABLE OPTICS:	120°
CONTROL:	2-channel DMX (NanoRouter)	FINISH OPTICS:	White or Black high temp ABS Plastic
POWER CABLE:	UL Standard 6 ft.	LED COLOR OPTIONS:	2000K, 2700K, 3500K
FIXTURE LENGTH:	12"-72", 6" increm.	TOTAL LINER FT. PER POWER FEED:	76 ft. @ 120V 156 ft. @ 277V
FIXTURE WIDTH:	1.04"	COLOR RENDERING INDEX (CRI):	90 + CRI
TOTAL HEIGHT:	.082" (not including clip)		

### PROJECT SPECIFICATIONS:

