



- Compact, variable light fixture.
- Fixture comes in 6" increments with a 12" minimum.
- Boca's patented CleanDim® technology ensures even dimming from 0-100%.
- Standard range shifts the color temperature from 3000K to 2000K as the fixture is dimmed.
- Designer selectable color ranges to suit a variety of projects, call factory for additional options.
- Uses standard line voltage dimming.
- Fixtures are compatible with both forward and reverse phase dimming or can use Boca's SDS module for 0-10V, Dali or DMX Dimming.
- Interior installations only.
- Total linear feet per power feed; 76 ft. @ 120V or 156ft. @ 277V
- Contact Boca Flasher for tips with custom installation procedures.

PRODUCT SPECIFICATIONS: MUST COMPLETE THE QUICKSHIP ORDERING GUIDE (SEE PAGE 3)

	WATTAGE	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS	BAFFLE (Not Available with 10° Optics)	REFLECTOR	QS
Nano Warm Dim	6W	2000K-3000K <small>(Contact Factory for other Options)</small>	120V 277V	10° 15°x40° 120°	W White B Black	F Fixed H Hinge	C Clear CLD Clear Light Diffused (Not Available with Optics) HD Heavy Diffused (Not Available with Optics)	SQ Square ASYM Asymmetric	N No Y Yes (Not Available with Optics)	QS Quickship

Quick Ship Terms:

- Orders Must be Received by 12pm EST
- Quick Ship Fixtures are Interior Use Only.
- Only Lengths of 500 Ft. or Less Can Be Ordered.
- No Custom Modifications are Available, Only the Standard Qualifies.
- Any Delays In Approvals May Void Quick Ship Possibility.
- Errors/Omissions will be Sole Responsibility of Purchaser.
- Additional Costs May Apply.
- Minimum Orders Will Apply.
- Subject to All Standard Approvals.
- All Orders Subject to All Boca Flasher Terms and Conditions.

Nano Warm Dim Order Terms:

- Lead Time: **10 Business Days After Approvals**
- (1) Power feed and (1) Terminator Included per 43 feet
- 2 Clips included per less than 48" lengths and 3 Clips included per on 48" & 96" lengths

NANO WARM DIM Quick Ship

Micro Profile LED Task and Cove Fixture with Warm Dim



TECHNICAL SPECIFICATIONS:

WATTAGE	6 watts per linear ft.
INPUT VOLTAGE	90-120V 230-277V
CONTROL	Leading Edge/Trailing Edge line dimmer
LED SPACING	0.65" on center
LENGTH	12-72", in 6" increment
TOTAL WIDTH	1.03"
TOTAL HEIGHT	0.82" (not including clip)
INPUT CURRENT	54mA @ 120V 24mA @ 277V
MOUNTING	Fixed, Hinge
AVAILABLE OPTICS	15×40°, 120°
FINISH OPTICS	White or Black High Temp. ABS Plastic
COLOR OPTIONS	2000K-3000K - (Contact Factory for other Options)
TOTAL LINEAR FT. PER POWER FEED	76ft. @ 120V, 156ft. @ 277V
RATING	IP50 Dry
COLOR RENDERING INDEX (CRI)	90 + CRI


LUMINAIRE INFORMATION:

IES Files Pending

· Specific Files Available On Request


MOUNTING INFORMATION:

- For vertical installation please contact the factory for specific mounting instructions.
- For installations above 4' please contact the factory.

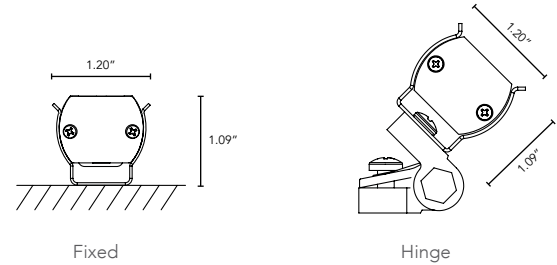


DIMENSIONS:

Plan View

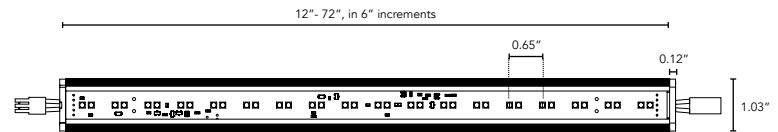

Elevation View



*Third Clip Required for 48" and Larger Fixtures



Nano Warm Dim - QuickShip

ORDER GUIDE

Customer:

Date:

PO:

Project:

Distributor:

TYPE	LENGTH 6" Increments	QUANTITY	WATTAGE	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS	BAFFLE	REFLECTOR <small>(Only Available with 120" Optics)</small>	
			Nano Warm Dim	6W	2000K-3000K							QS
			Nano Warm Dim	6W	2000K-3000K							QS
			Nano Warm Dim	6W	2000K-3000K							QS
			Nano Warm Dim	6W	2000K-3000K							QS
			Nano Warm Dim	6W	2000K-3000K							QS
			Nano Warm Dim	6W	2000K-3000K							QS
			Nano Warm Dim	6W	2000K-3000K							QS

Additional Power Feeds/End Caps Needed? Fill In Quantity, Additional Costs May Apply:

Project Notes:

Nano Warm Dim HD Order Terms:

- Lead Time: 10 Business Days After Approvals
- (1) Power feed and (1) Terminator Included per 43 feet
- 2 Clips included per less than 48" and 3 Clips included per on 48" & 96"

Quick Ship Terms:

- Orders Must be Received by 12pm EST
- Quick Ship Fixtures are Interior Use Only.
- Only Lengths of 500 Ft. or Less Can Be Ordered.
- No Custom Modifications are Available, Only the Standard Qualifies.
- Any Delays In Approvals May Void Quick Ship Possibility.
- Errors/Omissions will be Sole Responsibility of Purchaser.
- Additional Costs May Apply.
- Minimum Orders Will Apply.
- Subject to All Standard Approvals.
- All Orders Subject to All Boca Flasher Terms and Conditions.

Boca Flasher, Inc. 508 South Military Trail, Deerfield Beach, Florida 33442 USA Phone: 561.989.5338 Fax: 561.982.8323 © 2020 Boca Flasher, Inc

We are constantly improving our fixtures and reserve the right to change options and specifications. For specific requirements, contact your Boca Flasher sales representative. This product complies with IES LM-79-08 testing procedures and relevant standards. NANOLUME meets or exceeds Title 24 Compliance. >45 Lumens per Watt. For additional information and details visit our website at www.bocaflasher.com. All products proudly manufactured in the USA. All rights reserved. All names and trademarks are property of their respective owners.