




1 PLAN VIEW

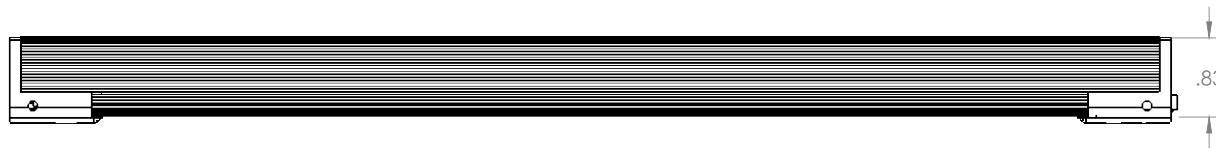


2 ELEVATION VIEW



END CAP CONDITIONS




MALE (M)





FEMALE (F)


MOUNTING OPTIONS



SIDE VIEW OF HINGE ASSEMBLY

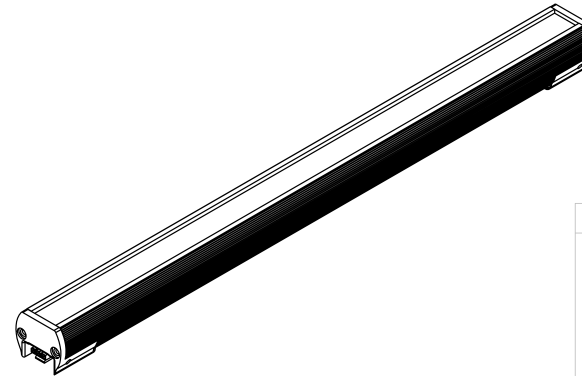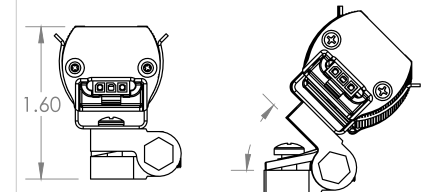

| TECHNICAL DATA                             |   |
|--|---|
| Parameter                                  | Data  |
| Power                                      | 3 watts per linear ft.                      |
| Input Voltage                              | 90-120V or 230-277V                         |
| Input Current per Linear Ft                | 26mA@120V or 14mA@277V                      |
| Control                                    | Leading-edge/Trailing-edge line dimmer      |
| Power Cable Length                         | UL Standard 6ft                             |
| LED Spacing                                | 5/8" on center                              |
| Fixture Length                             | 12"-72", in 4" increment                    |
| Fixture Width                              | 1.04"                                       |
| Total Height (not including clips)         | 0.82"                                       |
| Mounting                                   | Adjustable Swivel Clip                      |
| Available Optics                           | 120°  |
| Finish Options                             | White or Black high temperature ABS Plastic |
| LED Color Options                          | 2K, 24K, 27K, 3K, 35K, 4K, 5K, 65K          |
| Color Rendering Index                      | 90+ CRI                                     |
| Ratings                                    | Dry   |
| Total Linear ft per 20A breaker            | 432ft@120V or 804ft@277V                    |
| Total Linear ft per 15A breaker            | 324ft@120V or 600ft@277V                    |
| Total Linear ft per Power Feed Transformer | 156ft@120V or 276ft@277V                    |

|   |               |                                       |                        |                |
|---|---------------|---------------------------------------|------------------------|----------------|
| <br>LED Lighting Systems, Technologies, & Manufacturing |               | PRODUCT NAME:<br><b>NANOLUME 3W</b>   |                        |                |
|   |               | FILE NAME: TECHNICAL SHEET            | PART #: BF-NANOLUME    |                |
| 508 South Military Trail<br>Deerfield Beach FL, 33442   |               | www.BocaFlasher.com<br>(561) 989-5338 | DRAWN BY: HYERI KANG   | DATE: 03272020 |
| THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHTS OF BOCA FLASHER INC.  |               | DESIGN BY: LUIS ROSADO                | APPROVED BY: M. PINDER |                |
| SCALE:  | SHEET: 1 OF 1 | REV: B                                |                        |                |